



PAC-AMS




The **PAC-AMS** series is designed for use when an acoustical seal is needed to fill a gap between the wall and glass, or wall and mullion. The PAC-AMS is designed to fit slightly compressed to hold itself up in a cavity. The PAC-AMS is acoustically tested up to an STC 72. The PAC-AMS is available in several silicone colors from Dow or Sika. The PAC-AMS is sold in 6' 6" and 9' 10" ft lengths. The PAC-AMS does not require adhesive when installed.

PAC-AMS, A Low Cost, High Performance, Noise control Solution

Wood - Steel
Apartment
Commercial
Conference Rooms

Condo
Recording Studio
Home Theater
Commercial theater

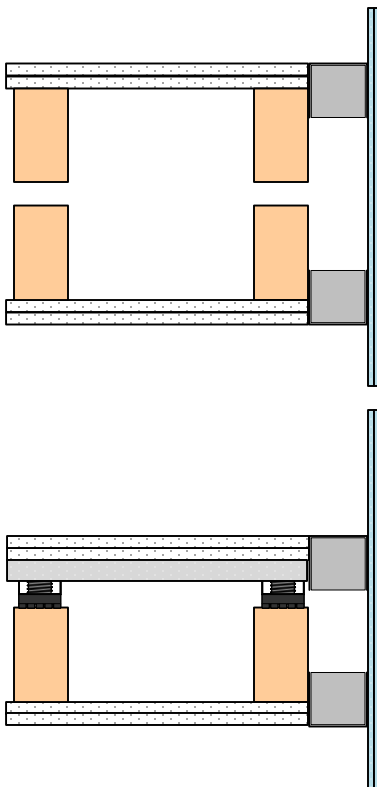

PAC-AMS specifications:

Acoustical performance:	STC 53 to 72
2 Sided	Yes
3 Sided	Yes
Cavity min	1/2"
Cavity Max	8"
Length	6' 6" or 9' 10"
Use on Vertical joints	Yes
Use on Walls	No
New Construction	Yes
Retro-fit Construction	Yes
Assembled In USA	Yes