





RSIC-1 ® Backer RSIC-1 ® Backer HD



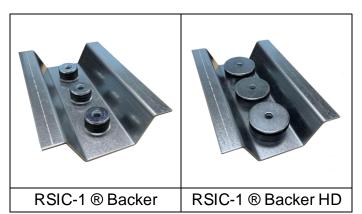

The RSIC-Backer series is a heavy duty mount used together with the RSIC-1 ® clips, creating the only complete noise isolation system that can support heavy items. The RSIC-1 ® Backer can be used in new construction or retrofit. The RSIC-1 ® Backer should be used when items need to be acoustically decoupled for noise and vibration isolation.

A few examples of the possible uses for the RSIC-1 ® Backer series of noise control clips: Cabinets, Chalk boards, Projector screens, Handicap grab bars, Lockers, TV wall mount support, Handrails, Library Shelves.

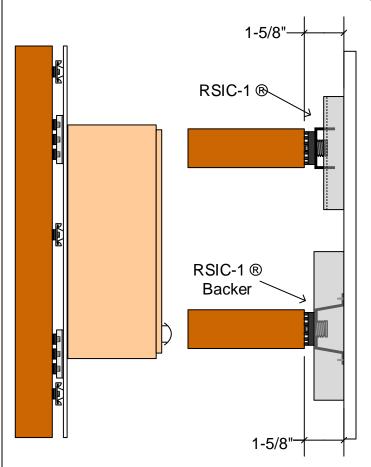


Wood	
Steel	
Metal deck	
Apartment	
Retail	
Conference Rooms	

Concrete	
Condo	
Commercial	
Recording Studio	
Home Theater	
Commercial theater	

RSIC® is the Low Cost, High		
Performance,		
Noise control Solution		


RSIC-1 ® Backer specifications:		
Acoustical design load: STD	108 Lbs	
Acoustical design load: HD	216 Lbs	
Total deflection	3 mm	
Double deflection	Yes (1.5 mm)	
Low VOC	Yes	
Adjustable	No	
Cavity min	1-5/8"	
Cavity Max	1-5/8"	
Adjustment limit	N/A	
Use on Ceilings	Yes	
Use on walls	Yes	
New Construction	Yes	
Assembled in USA	Yes	

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710 RSIC® is a registered Trade Mark of PAC International, LLC.

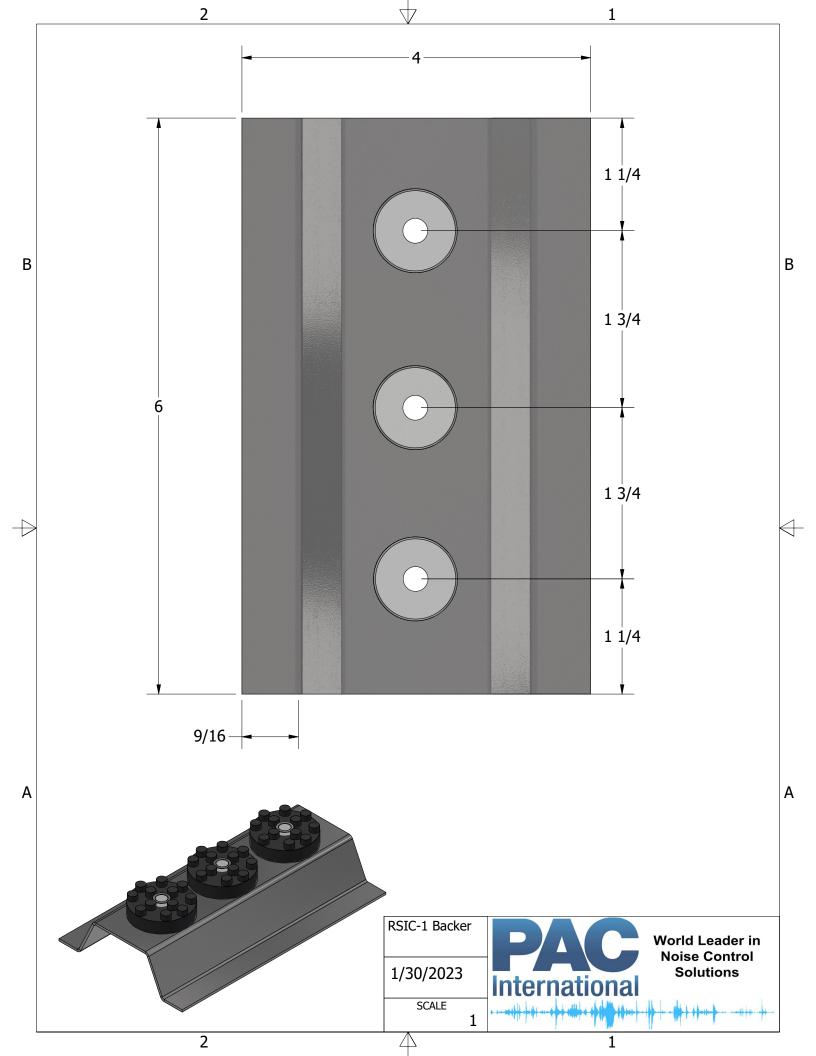

RSIC-1-BACKER INSTALLATION GUIDE

RSIC-1 BACKER RSIC-1 BACKER HD/DD

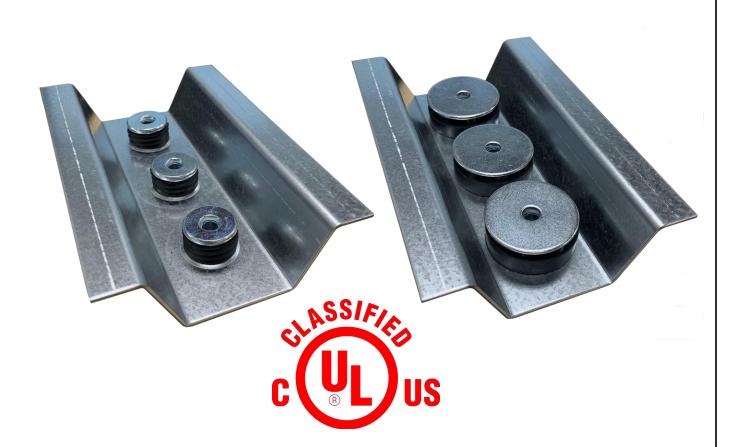

For use in with the RSIC-1 clip

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trade Mark

RSIC-1 BACKER INSTALLATION GUIDE



Resilient Sound Isolation Clip (RSIC-1 BACKER)

- Spacing: maximum 48 inches on center
- Maximum acoustical design load:

RSIC-1 BACKER 108 lbs


RSIC-1 BACKER HD/DD 216 lbs

• When attached to steel framing. Steel studs must be 20 Ga (30 mil) minimum thickness.



RSIC-1 BACKER dimensions:

- RSIC-1 BACKER clip 4" wide
- RSIC-1 BACKER clip 6" long
- RSIC-1 BACKER clip 1-5/8" deep



2-1/2" min




1-5/8" min



1/2" min

Fasteners:

- RSIC-1 BACKER to wood: #8 x 2-1/2 inch min.
- RSIC-1 BACKER HD/DD to wood: #10 or #12 x 2-1/2 inch min.
- RSIC-1 BACKER to Steel: # 8 x 1-5/8 inch min.
- RSIC-1 BACKER HD/DD to Steel: #10 or #12 x 1-5/8 inch min.
- Steel Track to RSIC-1 Backer: 1/2" min. pan head self drilling framing screw
- DO NOT fasten Resilient Sound Isolation Clips to framing members with nails. Use only approved screws.



Steel Track:

- Minimum requirements: 16 gauge Steel Track. Meets or exceeds SSMA min. requirements.
- Depth: 1-1/4 inch
- Width 6 inch wide.



Fire Test Information:

RSIC-1® Backer and RSIC-1 Backer HD for use wall designs of the U300, U400, V300, V400, and W400 wall series. Check our website for the latest updates of the fire testing approvals.

Www.PACInternationalLLC.com

Check UL Fire Resistance Directory File # R16638

Check UL's web pages. www.ul.com/database

Contact UL (877) UL- HELPS

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trade Mark

RSIC-1 BACKER INSTALLATION GUIDE



RSIC-1 BACKER 108 Lb per isolator max load

RSIC-1 BACKER Clip fastens to the wall framing adding support to the RSIC-1 clip wall system for supporting heavy loads.




RSIC-1 BACKER HD/DD 216 Lbs per isolator max load

RSIC-1 BACKER HD/DD Clip fastens to the wall framing adding support to the RSIC-1 clip wall system for supporting heavy loads.

Walls:


- RSIC-1 BACKER Resilient Sound Isolation Clip.
- Spacing not to be greater than 48 inches on center.
- Locate the areas where the additional support will be needed in the wall system. Make a note on the plans referencing the location of each RSIC-1 BACKER and the steel track for mounting the additional items to the wall after the gypsum board is installed.
- Fasten the Resilient Sound Isolation Clip (RSIC-1 BACKER) to the framing using a fastener ensuring all of the RSIC-1 BACKER clips are in the same horizontal plane
- Fasten the steel track to the RSIC-1 BACKER using 4 ea framing screws per RSIC-1 BACKER.

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

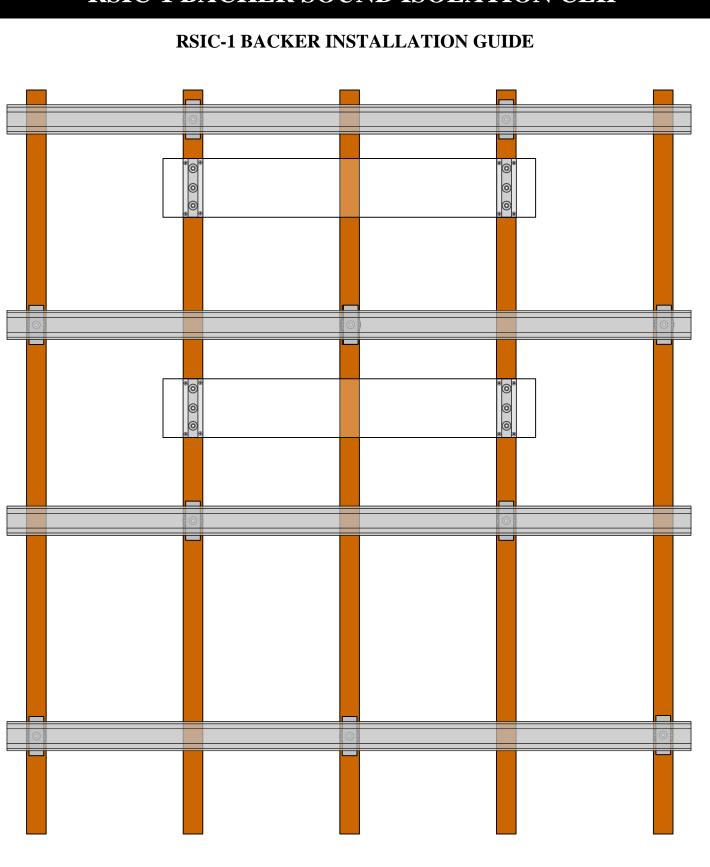


PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trade Mark

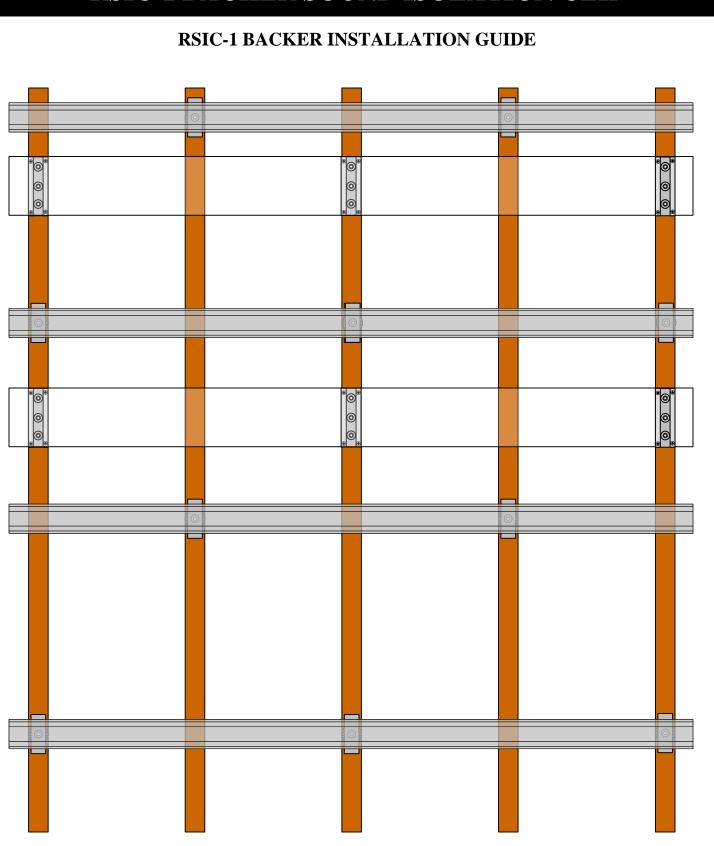

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710 RSIC® is a registered Trade Mark

RSIC-1 BACKER INSTALLATION GUIDE

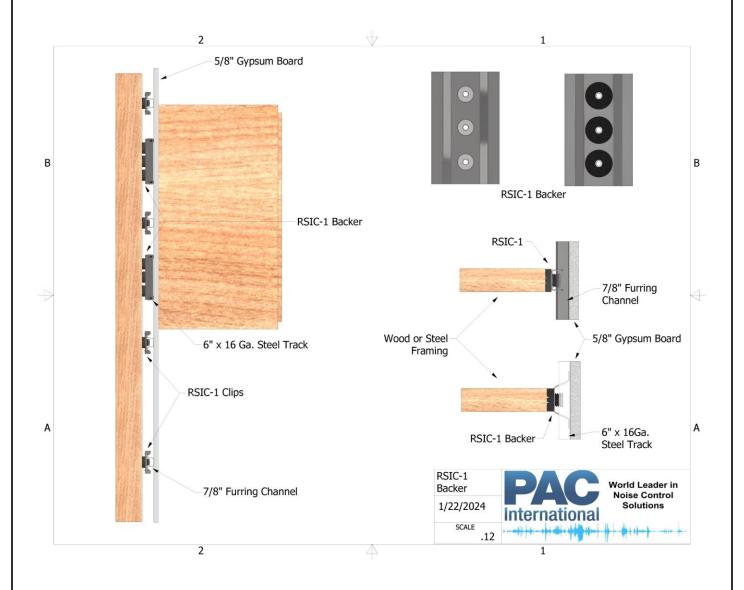

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710 RSIC® is a registered Trade Mark



PAC Product Warranty Disclaimer

WARRANTY DISCLAIMER AND LIABILITY LIMITATION LANGUAGE

WARRANTY AND DISCLAIMER AND LIABILITY LIMITATION LANGUAGE ONE YEAR WARRANTY Seller warrants to the original purchaser that its products are free from defects in material or workmanship for one year from the date of purchase from seller. Any allegedly defective product that is portable must be returned to seller prepaid. If upon examination it appears to seller's satisfaction that the product is defective, seller shall repair, replace, or return the purchase price of the product at seller's option. EXCEPT FOR THE FOREGOING, THERE IS NO OTHER WARRANTY, REPRESENTATION OR CONDITION OF ANY KIND; AND ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS EXCLUDED AND DISCLAIMED. Some states do not allow limitations on implied warranties, so the above limitation may not apply to you.

LIABILITY LIMITED TO RETURN OF PURCHASE PRICE

IT IS AGREED THAT SELLER'S LIABILITY AND PURCHASER'S SOLE REMEDY, WHETHER IN CONTRACT, UNDER ANY WARRANTY, IN TORT (INCLUDING NEGLIGENCE), IN STRICT LIABILITY OR OTHERWISE, SHALL NOT EXCEED THE RETURN OF THE AMOUNT OF THE PURCHASE PRICE PAID BY PURCHASER, AND UNDER NO CIRCUMSTANCES SHALL SELLER BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, PERSONAL INJURY, PROPERTY DAMAGE, DAMAGE TO OR LOSS OF EQUIPMENT, LOST PROFITS OR REVENUE, COSTS OF RENTING REPLACEMENTS AND OTHER ADDITIONAL EXPENSES, EVEN IF SELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE PRICE STATED FOR THE EQUIPMENT IS A CONSIDERATION IN LIMITING SELLER'S LIABILITY AND PURCHASER'S REMEDY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

SELLER NOT LIABLE FOR PURCHASER'S NEGLIGENCE

SELLER WILL NOT BE LIABLE FOR ANY DAMAGES, LOSSES OR EXPENSES AS A RESULT OF PURCHASER'S NEGLIGENCE, WHETHER DEEMED ACTIVE OR PASSIVE AND WHETHER OR NOT ANY SUCH NEGLIGENCE IS THE SOLE CAUSE OF ANY SUCH DAMAGE, LOSS OR EXPENSE.

MODEL FOR DEMONSTRATION PURPOSES ONLY

THE MODEL OR SAMPLE SHOWN BY SELLER TO BUYER IS USED FOR DEMONSTRATION PURPOSES ONLY. THERE IS NO WARRANTY THAT THE GOODS AS DELIVERED SHALL CONFORM TO THE MODEL OR SAMPLE, AND CONFORMITY OF THE GOODS TO THE MODEL OR SAMPLE IS NOT PART OF THE BASIS OF THE BARGAIN BETWEEN SELLER AND BUYER.

NO WARRANTY OR COMPLIANCE WITH SAFETY CODE OR REGULATION

SELLER DOES NOT WARRANT THAT ANY OF THE GOODS SOLD WILL MEET OR COMPLY WITH THE REQUIREMENTS OF ANY SAFETY CODE, BUILDING OR DWELLING CODE, OR REGULATION OF ANY STATE, MUNICIPALITY OR OTHER JURISDICTION.

NEVADA LAW APPLIES

SELLER AND BUYER AGREE THAT ALL ASPECTS OF THIS TRANSACTION INCLUDING THE APPLICABLE STATUTE OF LIMITATIONS SHALL BE GOVERNED BY THE INTERNAL LAW OF THE STATE OR NEVADA, AND NOT THE LAWS OF CONFLICTS.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state

PAC International, LLC., 2000 4th Ave Canby, OR 97013 • (866) 774-2100 • Fax (866) 649-2710 © PAC International, LLC. All Rights Reserved. RSIC® is a registered Trade Mark of PAC International, LLC.



RSIC-1

RSIC-SI-X

RSIC-SI-X ADM

RC-1 Boost

PAC-RCB

RSIC-SI-1 Ultra

RSIC-SI-CRC EZ

RSIC-SI-WHI

RSIC-SI-FF

RSIC-1 EXT04

RISC-1.5 CRC

RSIC-1 Low Profile

RSIC-1 Edge

RSIC-1 TTC

RSIC-1 Retro

RSIC-1 Backer

RSIC-1 ADM

RSIC-U

RSIC-U-HD

RSIC-WFI

RSIC-FGP

RSIC-DC04 RSIC-DC04 HD/DD

RSIC-DC04X2

RSIC-DC04X2 HD/DD

RSIC-V

RSIC-2

RSIC-2 Retro

RSIC-CWB

RSIC-CWB HD/DD

RSIC-CWB HD/DD DC

RSIC-Joist Isolator

RSIC-GDS Kit

RSIC-AMI

RSIC-FS TV

RSIC-Perimeter Tape

RSIC Super Screw

RSIC-Putty Pad

RSIC-Multi Clip

RSIC-FRC-HD

PAC-IFB

Safety Data Sheet

Article Statement

(PAC International, LLC Wall and Ceiling Isolation Products)

This document is provided for clarification of the Safety Data Sheets that you have requested for our product(s). OSHA Hazard Communication Standard requires a SDS for hazardous chemicals; however, the standard exempts all articles from the requirement. The explanation of an article is described per OSHA definition below.

Pursuant to 29 CRF 1910.1200 (b) (6) (v) and (c), the product described herein is an "article" or is otherwise excluded from OSHA regulations requiring that a Material Safety Data Sheet be prepared for it.

An article defined: manufactured item other than a fluid or particle: (i) which is formed to a specific shape or design during manufacturing; (ii) which has an end use function (s) dependent in whole or in part upon its shape or design during end use; and (iii) which does not release, or other wise result in exposure to, a hazardous chemical under normal conditions of use.

For technical information and additional resources covering these products please refer to PAC International published literature, e.g., data sheets, product drawings, and installation guidelines at www.pac-intl.com

As of the date of this document, the foregoing information is believed to be accurate and is provided in good faith to comply with applicable federal and state laws. However, no warranty or representation of law or fact, with respect to such information, is intended or given.



LEED Analysis RSIC-1 Backer

Recycled Content

PAC International's RSIC-1 Backer does not contain signification recycled content.

Fabrication Location

The RSIC-1 Backer is manufactured in Canby, OR 97013

Material Source

The extraction points for the materials in these products cannot be verified. Assume they are outside the 500 mile radius.