





### RSIC-1 EXT04

The RSIC-1 EXT04 EXT04® is designed for use where an additional drop for HVAC, Plumbing, or Electrical Chases is needed. This clip gives you the flexibility to drop a ceiling as much as 4" from its original height. The RSIC-1 EXT04 EXT04® is also used to level out uneven floor joists. This clip has proven to be very popular with the Home Theater industry. It creates a dropped ceiling, allowing an open chase for the new wires, all while retaining the superior acoustical performance of the RSIC clips.

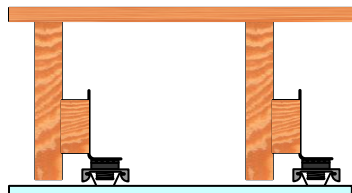

Low Profile  
Installation

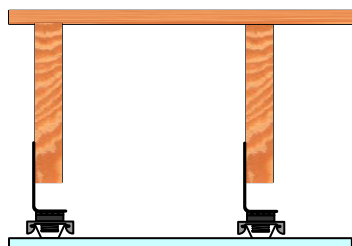

Dropped Ceiling  
Installation




### **RSIC-1 EXT04, the Low Cost, High Performance, Noise control Solution**

Concrete
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

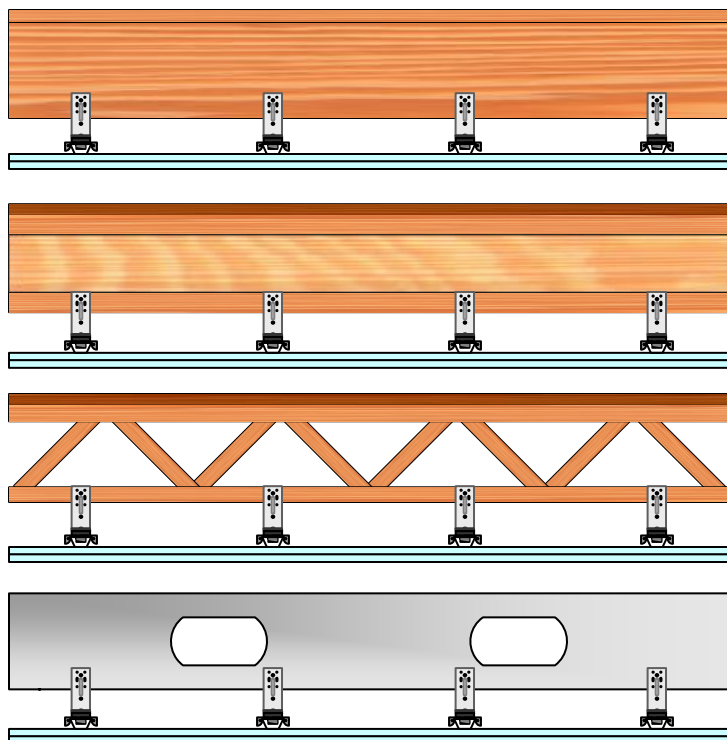

### RSIC-1 EXT04 specifications:

Acoustical design load:	36 Lbs
Total deflection	3 mm
Double deflection	Yes (1.5 mm)
Low VOC	Yes
Adjustable	Yes
Cavity min	1/2"
Cavity Max	4"
Adjustment limit	3-1/2"
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	No
Assembled In USA	Yes



World Leader  
in Noise  
Control  
Solutions



GYPSUM BOARD ASSEMBLIES 2021

PAC INTERNATIONAL, LLC.

### 1. Product Name

- RSIC-1 EXT04 Resilient Sound Clip..
  - RSIC-1 EXT04 Resilient Sound Isolation height adjustable Clip

### 2. Manufacturer

PAC International, LLC  
7260 W Azure Dr  
Suite 140-213  
Las Vegas, NV 89130  
Phone: (866) 774-2100  
Fax: (866) 649-2710  
Email: [info@pac-intl.com](mailto:info@pac-intl.com)  
Web: [www.pac-intl.com](http://www.pac-intl.com)

### 3. Product Description

#### RSIC-1 EXT04

The RSIC-1 EXT04 is designed for use with ceiling system where noise control is needed. The RSIC-1 EXT04 assembly decouples and isolates the gypsum board or other sheet goods from the structure increasing the acoustical performance of the system.

The RSIC-1 EXT04 stops the noise and vibrations that typically would be allowed to transfer through the structure.

#### Materials and Composition

The RSIC-1 EXT04 Spring and rubber isolator are made of rubber and/or manufactured rubber compound, and steel parts.

#### Environmental Considerations

The RSIC-1 EXT04 may contribute to LEEDS points, by reducing materials needed to achieve high STC and IIC floor ceiling systems.

The rubber and Steel portions can be recycled.

#### Weight-bearing Information

With an acoustical design load rating of up to 36 pounds, the RSIC-1 EXT04 clip can support up to two layers of 5/8 inch gypsum board when spaced at 24" x 48" oc. For heavier systems increase the number of isolators and channel to support the additional weight of the system. The RSIC-1 EXT04 clip fastens directly to the underside of the structure.

#### RSIC-1 EXT04



#### Product Limitations

For interior use only with operating temperatures of 40–100 degrees F (4.4–37.8 degrees C). Max load 26 Lbs, 13Lbs, 7 Lbs.

### 4. Technical Data

Division: **09-2000**  
**09-8000**  
**09-8500**  
**10-2000**

#### Applicable Standards

##### ASTM International (ASTM)

- **ASTM E90** Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
- **ASTM E492** Standard Test Method for Laboratory Measurement of Impact Sound Transmission Loss of Building Partitions and Elements
- **ASTM E413** Classification for Rating Sound Insulation

##### Underwriters Laboratories (UL)

- **UL Fire Resistance Directory**; [www.ul.com](http://www.ul.com) or visit [here](#).

### 5. Installation

#### General installation:

follow manufacturer's specific installation instructions. Install as required by UL fire resistive design.

- Install RSIC-1 EXT04 Resilient Sound Isolation Spring Clip following the manufacturer recommendations



**World Leader  
in Noise  
Control  
Solutions**



## GYPSUM BOARD ASSEMBLIES 2021

PAC INTERNATIONAL, LLC.

- Fasten the RSIC-1 Ext04 to the structure
  - For Wood framed ceilings use 2 ea 6 x 1-1/2" long coarse thread screw min.
  - For Steel framed ceilings use a min length #8 x 1/2" long self-drilling fine thread screw
- Install 7/8" 25 Ga drywall furring channel (Hat Channel) into RSIC-1 EXT04 at a maximum of 24 x 48 inches on center. 7/8" 25 GA drywall furring channel snaps into the RSIC-1 Ext04 bottom.
- Max design load of each RSIC-1 EXT04. 36 Lb.
- Max spacing 24" x 48" oc.
- Splicing Drywall Furring Channels:
  - Splice drywall furring channels with minimum of six inch overlap.
  - Secure laps with two framing screws or 18 gauge tie wire double wrapped
  - Locate splices between resilient sound isolation clips
  - Do not locate splices on resilient sound isolation clips
- Flanking Noise:
  - Review installation details to prevent structure-borne flanking noise
  - Do not allow drywall furring channels or gypsum board to contact wall framing members
- Gypsum Board:
  - Install gypsum board in perpendicular to the Drywall Furring Channel. Leave a 1/4 inch (6 mm) gap around perimeter for acoustical sealant application
  - Install gypsum board in accordance with ASTM C840 as specified in Section 09250
- Acoustical Sealant:
  - Seal potential air leaks with acoustical sealant to achieve best Field Sound Transmission Class (FSTC)
  - Seal electrical outlets and penetrations with acoustical sealant
  - Apply fire-rated acoustical sealant at locations where fire- rated assembly is required
- Putty Pad Sealant: acoustically seal with putty pads, electrical boxes in walls and ceilings in which resilient sound isolation clips are used

## 6. Availability and Cost

Please contact PAC International, LLC. for availability and pricing information.

## 7. Warranty

RSIC-1 EXT04 clips are guaranteed free of manufacturer defects. Only remedy is the replacement of the defective component or components. Manufacturer is not liable for delays or extra costs.

## 8. Maintenance

No maintenance is necessary.


## 9. Technical Services

PAC International LLC. offers online product pages, installation guides, and specification sheets. Technical information can be found on the website, [www.pac-intl.com](http://www.pac-intl.com) or by calling 866-774-2100

Fire ratings, sound test assemblies, CAD drawings, assembly drawings and clip specifications are also on the website.

## 10. Filing Systems

- Additional product information is available from the manufacturer upon request

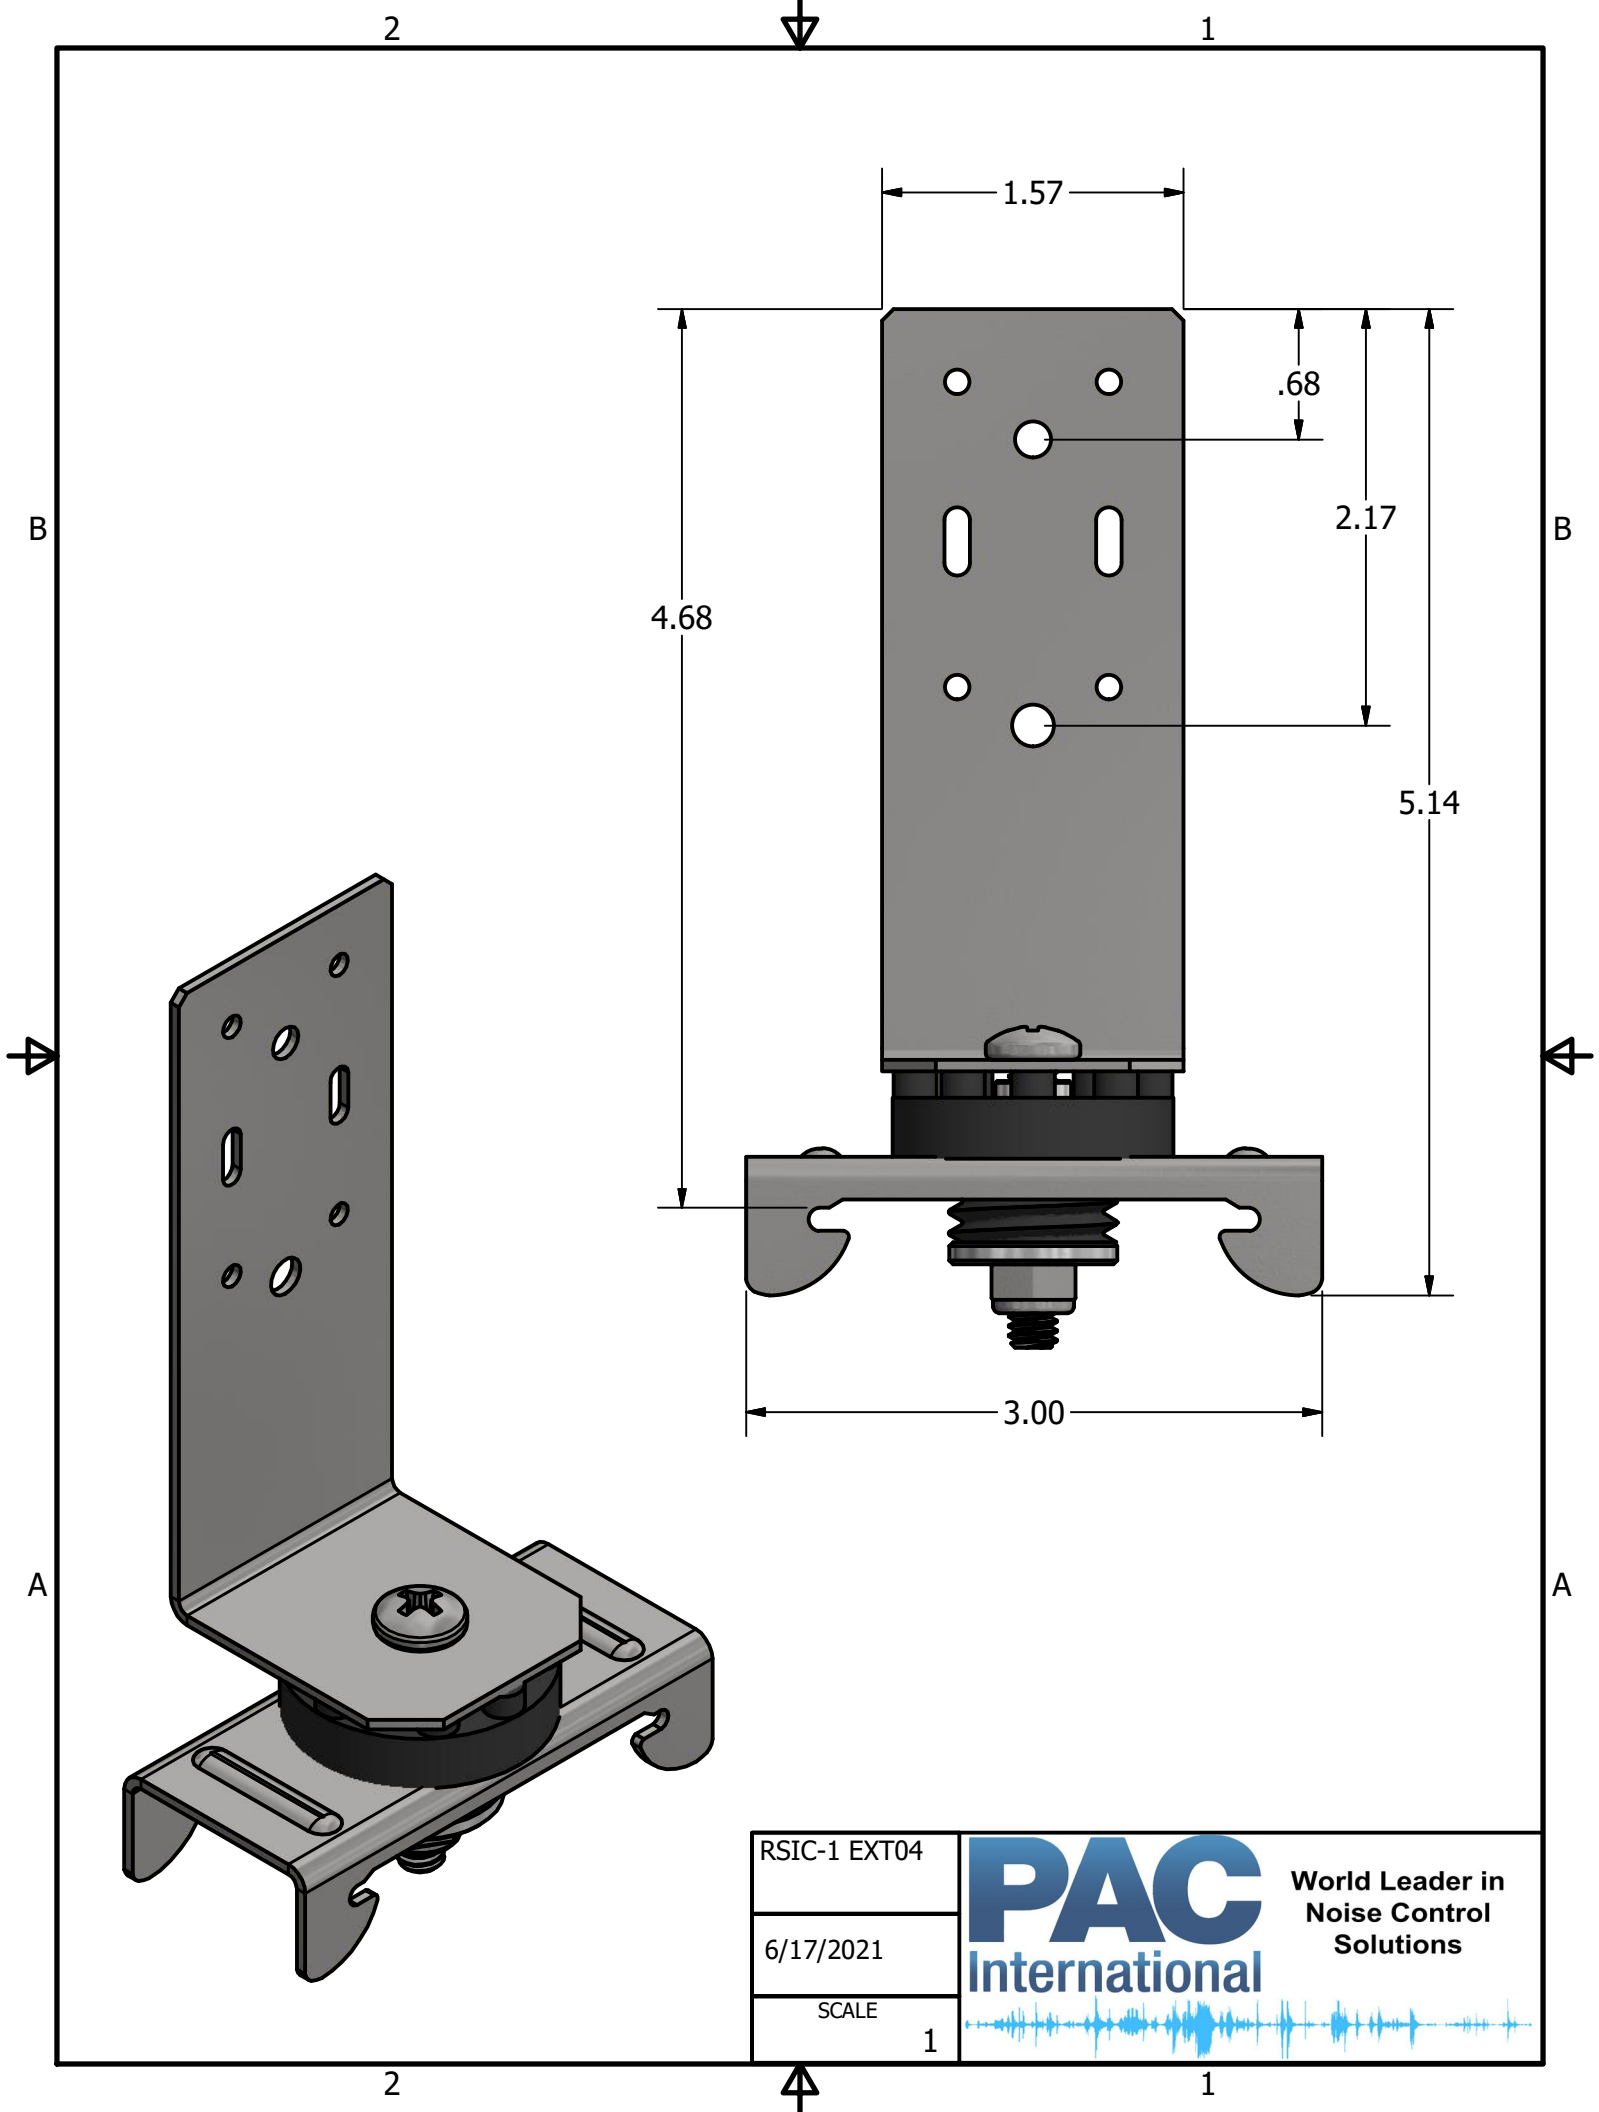

RSIC-1 EXT04

6/17/2021

SCALE

1

**PAC**  
International

World Leader in  
Noise Control  
Solutions



# **RSIC-1 EXT04 SOUND ISOLATION CLIP**

## **RSIC-1 EXT04 INSTALLATION GUIDE**

# **RSIC-1 EXT04**









**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.

# RSIC-1 EXT04 SOUND ISOLATION CLIP

## RSIC-1 EXT04 INSTALLATION GUIDE

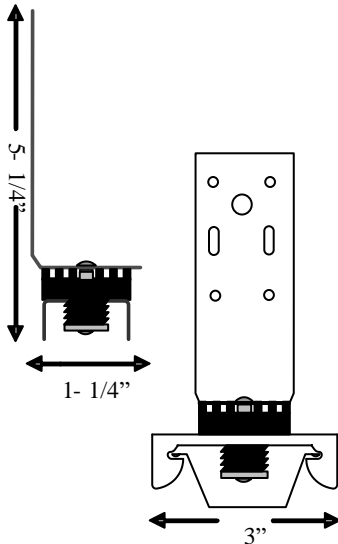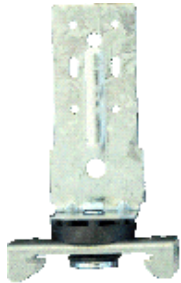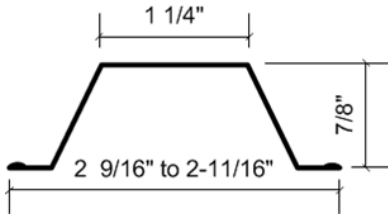

### Furring Channel:

Minimum requirements: 25 gauge, hemmed edge detail required on all 25 gauge furring channel. Meets or exceeds SSMA min. requirements.

Optional: 22 Gauge (no hemmed edge required with 22 gauge)

Depth: 7/8 inch

Width Bottom: 2-9/16" to 2-11/16" inch wide nominal.

Width Top: 1-1/4 inch wide

Splice drywall furring channel (hat track) with 6 inch overlap in mid span (between two clip) secure with 18 Ga tie wire, or two 7/16" framing screws.

### Resilient Sound Isolation Clip (RSIC-1 EXT04)

Spacing: maximum 48 inches on center

Maximum acoustical design load: 36 lbs

### Fasteners:

RSIC-1 EXT04 to wood: #8 x 1-1/2 inch minimum size coarse thread screw. (Recommended #12 or #10 x 1-1/2 inch hex head)

RSIC-1 EXT04 to Steel: # 8 x 1 inch minimum size fine thread screw. (Recommended #12 or #10 x 1-5/8 inch hex head)

DO NOT fasten Resilient Sound Isolation Clips (RSIC-1) to framing members with nails. Use only approved screws.

### RSIC-1 EXT04 dimensions:

RSIC-1 EXT04 clip 3" wide

RSIC-1 EXT04 and Drywall Furring Channel 5-5/8" deep

RSIC-1 EXT04 clip 1-1/4" deep

Labor rates provided to PAC International, Inc by independent contracting firm

### Average Labor Rates:

RSIC-1 EXT04: 60 clips per man hour

Drywall Furring Channel: 550LF per man hour

Labor rates provided to PAC International, Inc by independent contracting firm

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.

# RSIC-1 EXT04 SOUND ISOLATION CLIP


## RSIC-1 EXT04 INSTALLATION GUIDE

### Ceilings: One and Two layer 5/8" gypsum

- Resilient Sound Isolation Clip (RSIC-1 EXT04) shall be 48 inches (1219mm) on center maximum. (Perpendicular to Joist/Truss)
- Fasten the Resilient Sound Isolation Clip (RSIC-1 EXT04) to the side of the structural members with approved fasteners
- Ensure the metal "L" bracket is tight to the framing member.
- Locate the first row RSIC-1 EXT04 clips is within 8 inches of the wall at each end of a run.
- Snap in the drywall furring channel (hat track) into the RSIC-1 clip at right angles (perpendicular or parallel) to the framing members.

### General Information:

- Resilient Sound Isolation Clip (RSIC-1 EXT04), Furring Channel (hat track) and Gypsum board shall not carry heavy loads such as cabinets or bookshelves
- Splice furring channel (hat track) with 6 inch overlap in mid span, secure with 18 Ga. Tie wire or with two framing screws (7/16")
- Seal all potential air leaks with non-hardening acoustical caulking to achieve best noise control results. Use fire rated sealant where required.

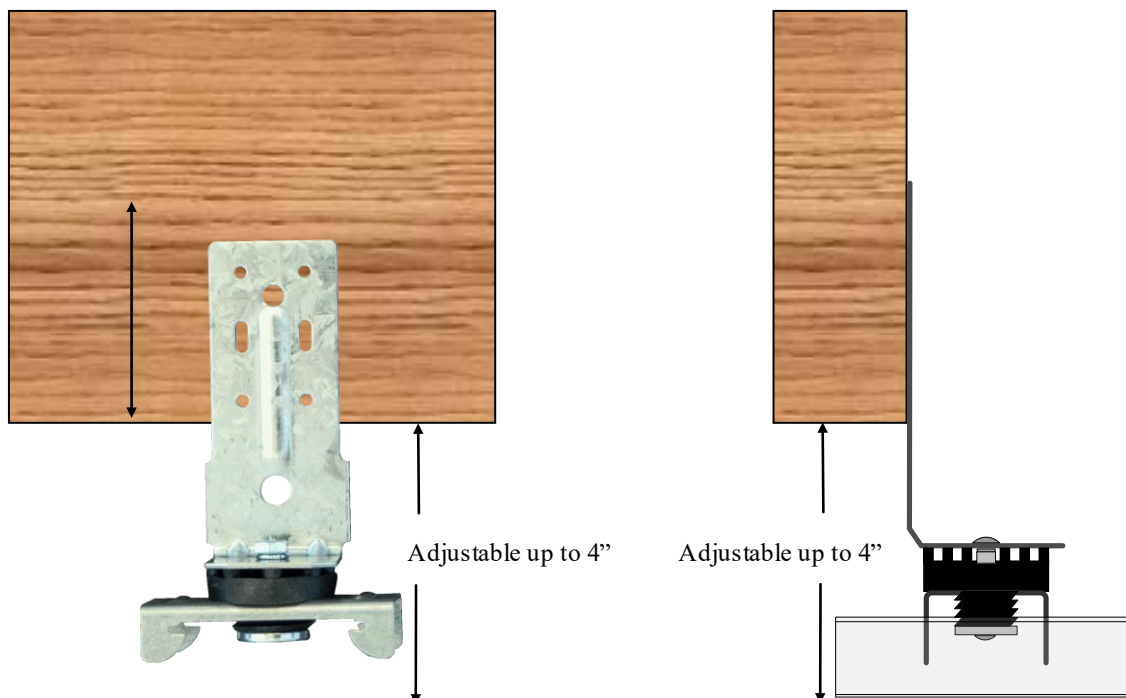

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**


© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.

# RSIC-1 EXT04 SOUND ISOLATION CLIP

## RSIC-1 EXT04 INSTALLATION GUIDE


### RSIC-1EXT04 Ceiling System Framing at 24" o.c.

RSIC-1EXT04 clips at 24" x 48" o.c. 1 or 2 Layers of 5/8" Gypsum Board

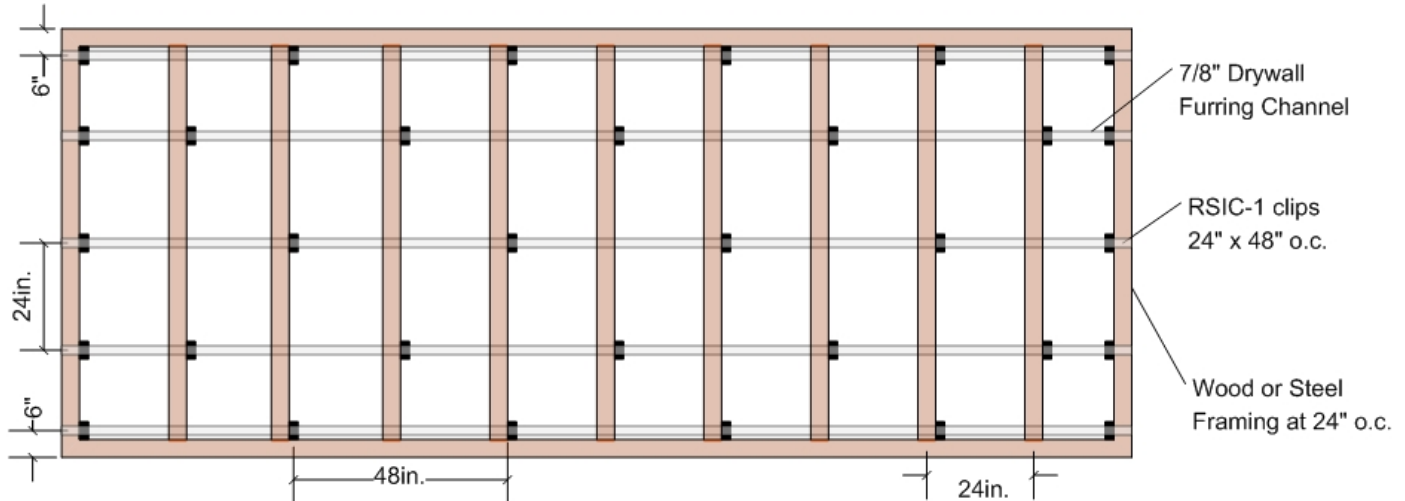

### RSIC-1EXT04 Ceiling System Framing at 16" o.c.

RSIC-1EXT04 clips at 24" x 48" o.c. 1 or 2 Layers of 5/8" Gypsum Board

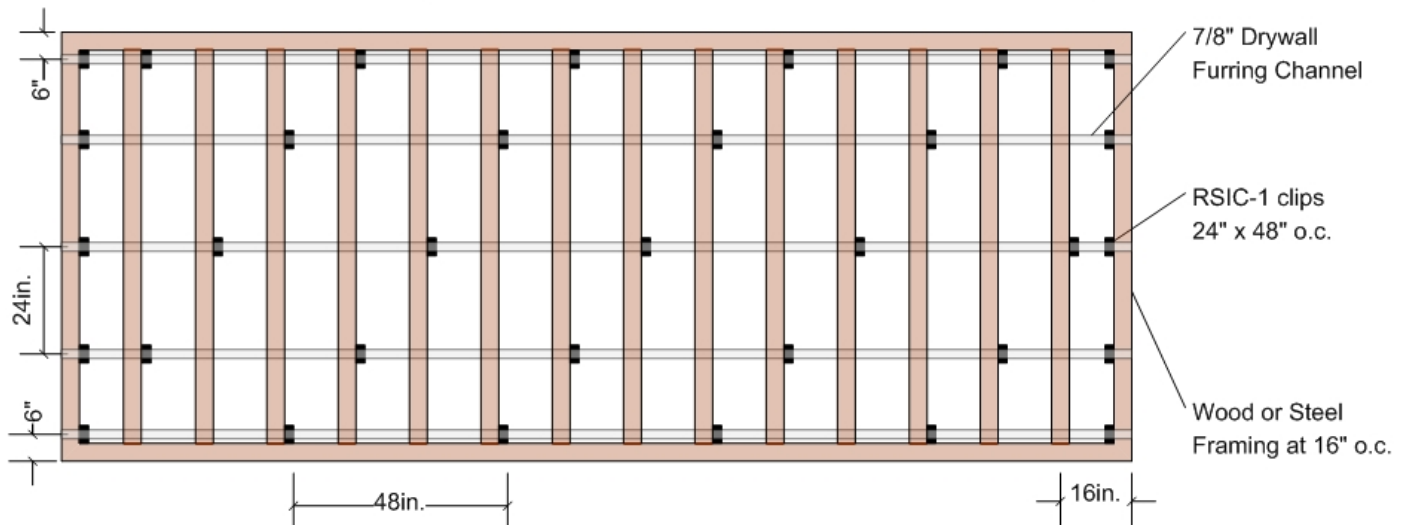

PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)


© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.

# RSIC-1 EXT04 SOUND ISOLATION CLIP

## RSIC-1 EXT04 INSTALLATION GUIDE


### RSIC-1EXT04 Ceiling System Framing at 24" o.c.

RSIC-1EXT04 clips at 16" x 48" o.c. 3 Layers of 5/8" Gypsum Board

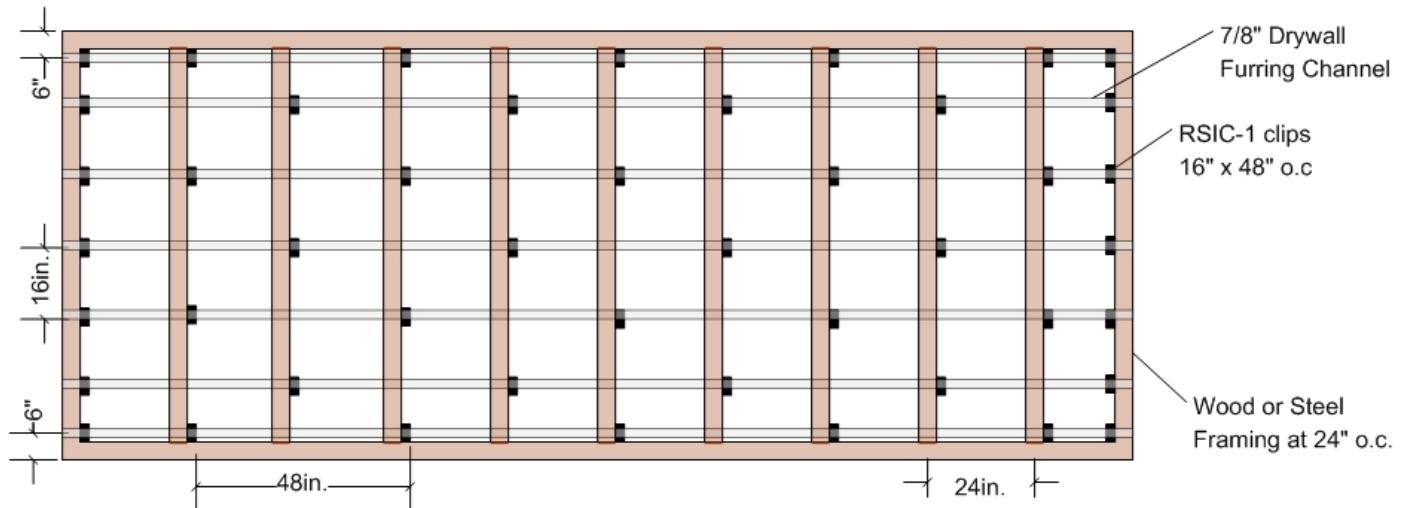

### RSIC-1 Ceiling System with Framing at 16" o.c.

RSIC-1EXT04 clips at 16" x 48" o.c. 3 Layers of 5/8" Gypsum Board

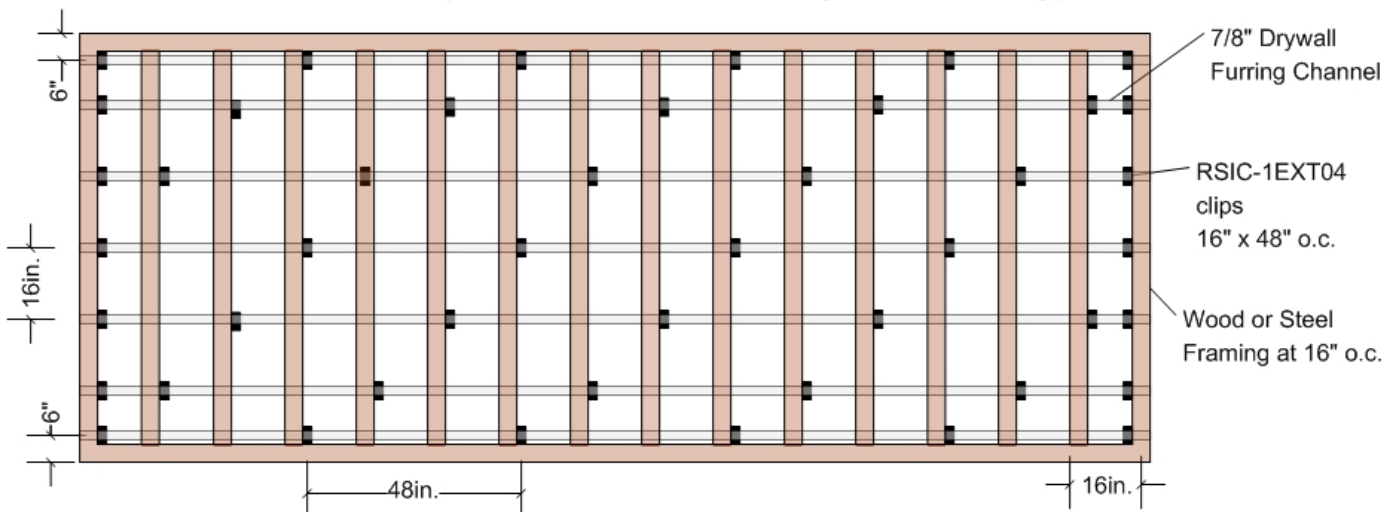


PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.

# RSIC-1 EXT04 SOUND ISOLATION CLIP

## RSIC-1 EXT04 INSTALLATION GUIDE

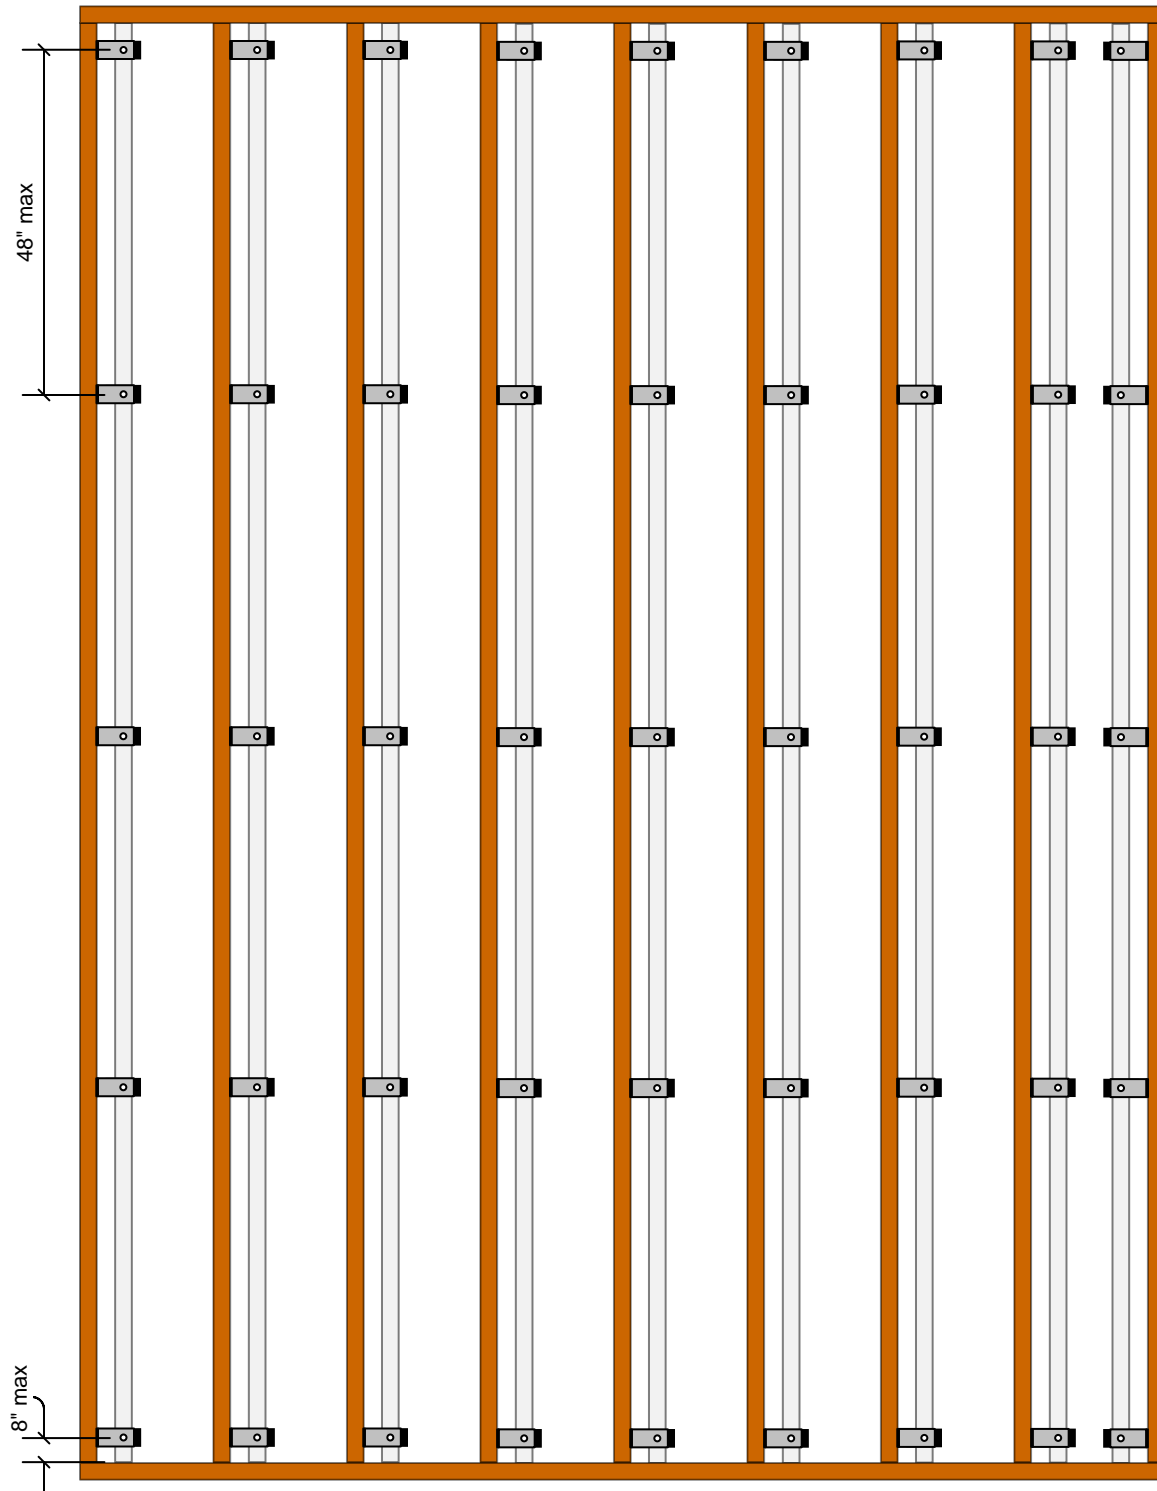

PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.

# RSIC-1 EXT04 SOUND ISOLATION CLIP

## RSIC-1 EXT04 INSTALLATION GUIDE



Members of the International  
Code Council

### WARRANTY DISCLAIMER AND LIABILITY LIMITATION LANGUAGE

#### **NO EXPRESS OR IMPLIED WARRANTIES**

THERE IS NO WARRANTY, REPRESENTATION OR CONDITION OF ANY KIND; AND ANY WARRANTY, EXPRESS OR IMPLIED, IS EXCLUDED AND DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow limitations on implied warranties, so the above limitation may not apply to you.

#### **LIABILITY LIMITED TO RETURN OF PURCHASE PRICE**

IT IS AGREED THAT SELLER'S LIABILITY AND PURCHASER'S SOLE REMEDY, WHETHER IN CONTRACT, UNDER ANY WARRANTY, IN TORT (INCLUDING NEGLIGENCE), IN STRICT LIABILITY OR OTHERWISE, SHALL NOT EXCEED THE RETURN OF THE AMOUNT OF THE PURCHASE PRICE PAID BY PURCHASER, AND UNDER NO CIRCUMSTANCES SHALL SELLER BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, PERSONAL INJURY, PROPERTY DAMAGE, DAMAGE TO OR LOSS OF EQUIPMENT, LOST PROFITS OR REVENUE, COSTS OF RENTING REPLACEMENTS AND OTHER ADDITIONAL EXPENSES, EVEN IF SELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE PRICE STATED FOR THE EQUIPMENT IS A CONSIDERATION IN LIMITING SELLER'S LIABILITY AND PURCHASER'S REMEDY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

#### **SELLER NOT LIABLE FOR PURCHASER'S NEGLIGENCE**

SELLER WILL NOT BE LIABLE FOR ANY DAMAGES, LOSSES OR EXPENSES AS A RESULT OF PURCHASER'S NEGLIGENCE, WHETHER DEEMED ACTIVE OR PASSIVE AND WHETHER OR NOT ANY SUCH NEGLIGENCE IS THE SOLE CAUSE OF ANY SUCH DAMAGE, LOSS OR EXPENSE.

#### **MODEL FOR DEMONSTRATION PURPOSES ONLY**

THE MODEL OR SAMPLE SHOWN BY SELLER TO BUYER IS USED FOR DEMONSTRATION PURPOSES ONLY. THERE IS NO WARRANTY THAT THE GOODS AS DELIVERED SHALL CONFORM TO THE MODEL OR SAMPLE, AND CONFORMITY OF THE GOODS TO THE MODEL OR SAMPLE IS NOT PART OF THE BASIS OF THE BARGAIN BETWEEN SELLER AND BUYER.

#### **NO WARRANTY OR COMPLIANCE WITH SAFETY CODE OR REGULATION**

SELLER DOES NOT WARRANT THAT ANY OF THE GOODS SOLD WILL MEET OR COMPLY WITH THE REQUIREMENTS OF ANY SAFETY CODE, BUILDING OR DWELLING CODE, OR REGULATION OF ANY STATE, MUNICIPALITY OR OTHER JURISDICTION.

#### **NEVADA LAW APPLIES**

SELLER AND BUYER AGREE THAT ALL ASPECTS OF THIS TRANSACTION INCLUDING THE APPLICABLE STATUTE OF LIMITATIONS SHALL BE GOVERNED BY THE INTERNAL LAW OF THE STATE OF NEVADA, AND NOT THE LAWS OF CONFLICTS.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state

**PAC International, LLC. Tel: (866) 774-2100 Web Site: [www.pac-intl.com](http://www.pac-intl.com)**

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark.



World Leader in  
Noise Control  
Solutions



## LEED Analysis **RSIC-1 EXT04**

### **Recycled Content**

PAC International's RSIC-1 EXT04 does not contain significant recycled content.

### **Fabrication Location**

The RSIC-1 EXT04 is manufactured in Canby, OR 97013

### **Material Source**

The extraction points for the materials in these products cannot be verified. Assume they are outside the 500 mile radius.



World Leader in  
Noise Control  
Solutions



## Safety Data Sheet

Article Statement

(PAC International, LLC Wall and Ceiling Isolation Products)

RSIC-1  
RSIC-SIX  
RC-1 Boost  
RSIC-WHI  
RSIC-SI-1 Ultra  
RSIC-SI-CRC EZ  
RSIC-SI-WHI  
RSIC-SI-FF  
RSIC-1 EXT04  
RSIC-1.5 CRC  
RSIC-1 LOW PROFILE  
RSIC-1 EDGE  
RSIC-1 TTC  
RSIC-1 RETRO  
RSIC-1 BACKER  
RSIC-1 ADM MULTI CLIP/SHOOT IN  
RSIC-1 ADM MINI DROP IN  
RSIC-1 ADM WOOD  
RSIC-1 ADM SIDE MOUNT  
RSIC-U  
RSIC-U-HD  
RSIC-WFI  
RSIC-FGP  
RSIC-DC04  
RSIC-DC04HD/DD  
RSIC-DC04X2  
RSIC-DC04X2HD/DD  
RSIC-V  
RSIC-FCR-HD  
RSIC-2  
RSIC-2 RETRO  
RSIC-CWB  
RSIC-CWB HD/DD  
RSIC-CWB HD/DD DC  
RSIC-JOIST ISOLATOR  
RSIC-GDS KIT  
RSIC-AMI  
RSIC-FS TV  
RSIC-PERIMETER TAPE  
RSIC SUPER SCREW  
RSIC-PUTTY PADS  
RSIC MUTLI CLIP  
PAC PRO MC 150+  
LEVELING CLIP

This document is provided for clarification of the Safety Data Sheets that you have requested for our product(s). OSHA Hazard Communication Standard requires a SDS for hazardous chemicals; however, the standard exempts all articles from the requirement. The explanation of an article is described per OSHA definition below.

*Pursuant to 29 CFR 1910.1200 (b) (6) (v) and (c), the product described herein is an “article” or is otherwise excluded from OSHA regulations requiring that a Material Safety Data Sheet be prepared for it.*

*An article defined: manufactured item other than a fluid or particle: (i) which is formed to a specific shape or design during manufacturing; (ii) which has an end use function (s) dependent in whole or in part upon its shape or design during end use; and (iii) which does not release, or other wise result in exposure to, a hazardous chemical under normal conditions of use.*

For technical information and additional resources covering these products please refer to PAC International published literature, e.g., data sheets, product drawings, and installation guidelines at [www.pac-intl.com](http://www.pac-intl.com)

As of the date of this document, the foregoing information is believed to be accurate and is provided in good faith to comply with applicable federal and state laws. However, no warranty or representation of law or fact, with respect to such information, is intended or given.



**World Leader in  
Noise Control  
Solutions**



RSIC-1 ®  
RSIC-SI-X  
RSIC-SI-X ADM  
RSIC-SI-X Low Profile  
RSIC-SI-X CRC  
RC-1 Boost ®  
PAC-RCB  
RSIC-SI-CRC2 LP  
RSIC-SI-1 Ultra  
RSIC-SI-CRC EZ  
RSIC-SI-WHI  
RSIC-SI-FF  
RSIC-1 EXT04  
RISC-1.5 CRC  
RSIC-1 Low Profile  
RSIC-1 Edge  
RSIC-1 TTC  
RSIC-1 Retro  
RSIC-1 Backer  
RSIC-1 ADM  
RSIC-U  
RSIC-U-HD  
RSIC-WFI  
RSIC-FGP  
RSIC-DC04  
RSIC-DC04 HD/DD  
RSIC-DC04X2  
RSIC-DC04X2 HD/DD  
RSIC-V  
RSIC-V Backer  
RSIC-2  
RSIC-2 Retro  
RSIC-CWB  
RSIC-CWB HD/DD  
RSIC-CWB HD/DD DC  
RSIC-Joist Isolator  
RSIC-GDS Kit  
RSIC-AMI  
RSIC-FS TV  
RSIC-Perimeter Tape  
RSIC Super Screw  
RSIC-Putty Pad  
RSIC-Multi Clip  
RSIC-FRC-HD  
PAC-IFB

## **RSIC ® Product Warranty Disclaimer**

### **WARRANTY DISCLAIMER AND LIABILITY LIMITATION LANGUAGE** **ONE YEAR WARRANTY**

Seller warrants to the original purchaser that its products are free from defects in material or workmanship for one year from the date of purchase from seller. Any allegedly defective product that is portable must be returned to seller prepaid. If upon examination it appears to the seller's satisfaction that the product is defective, seller shall repair, replace or return the purchase price of the product at seller's option.

EXCEPT FOR THE FORGOING, THERE IS NO WARRANTY, REPRESENTATION OR CONDITION OF ANY KIND; AND ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS EXCLUDED AND DISCLAIMED. Some states do not allow limitations on implied warranties, so the above limitation may not apply to you.

### **LIABILITY LIMITED TO RETURN OF PURCHASE PRICE**

IT IS AGREED THAT SELLER'S LIABILITY AND PURCHASER'S SOLE REMEDY, WHETHER IN CONTRACT, UNDER ANY WARRANTY, IN TORT (INCLUDING NEGLIGENCE), IN STRICT LIABILITY OR OTHERWISE, SHALL NOT EXCEED THE RETURN OF THE AMOUNT OF THE PURCHASE PRICE PAID BY PURCHASER, AND UNDER NO CIRCUMSTANCES SHALL SELLER BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, PERSONAL INJURY, PROPERTY DAMAGE, DAMAGE TO OR LOSS OF EQUIPMENT, LOST PROFITS OR REVENUE, COSTS OF RENTING REPLACEMENTS AND OTHER ADDITIONAL EXPENSES, EVEN IF SELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE PRICE STATED FOR THE EQUIPMENT IS A CONSIDERATION IN LIMITING SELLER'S LIABILITY AND PURCHASER'S REMEDY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

### **SELLER NOT LIABLE FOR PURCHASER'S NEGLIGENCE**

SELLER WILL NOT BE LIABLE FOR ANY DAMAGES, LOSSES OR EXPENSES AS A RESULT OF PURCHASER'S NEGLIGENCE, WHETHER DEEMED ACTIVE OR PASSIVE AND WHETHER OR NOT ANY SUCH NEGLIGENCE IS THE SOLE CAUSE OF ANY SUCH DAMAGE, LOSS OR EXPENSE.

### **MODEL FOR DEMONSTRATION PURPOSES ONLY**

THE MODEL OR SAMPLE SHOWN BY SELLER TO BUYER IS USED FOR DEMONSTRATION PURPOSES ONLY. THERE IS NO WARRANTY THAT THE GOODS AS DELIVERED SHALL CONFORM TO THE MODEL OR SAMPLE, AND CONFORMITY OF THE GOODS TO THE MODEL OR SAMPLE IS NOT PART OF THE BASIS OF THE BARGAIN BETWEEN SELLER AND BUYER.

### **NO WARRANTY OR COMPLIANCE WITH SAFETY CODE OR REGULATION**

SELLER DOES NOT WARRANT THAT ANY OF THE GOODS SOLD WILL MEET OR COMPLY WITH THE REQUIREMENTS OF ANY SAFETY CODE, BUILDING OR DWELLING CODE, OR REGULATION OF ANY STATE, MUNICIPALITY OR OTHER JURISDICTION.

### **NEVADA LAW APPLIES**

SELLER AND BUYER AGREE THAT ALL ASPECTS OF THIS TRANSACTION INCLUDING THE APPLICABLE STATUTE OF LIMITATIONS SHALL BE GOVERNED BY THE INTERNAL LAW OF THE STATE OR NEVADA, AND NOT THE LAWS OF CONFLICTS.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state