


# RSIC-1 TTC SOUND ISOLATION SYSTEMS


## RSIC-1 TTC INSTALLATION GUIDE

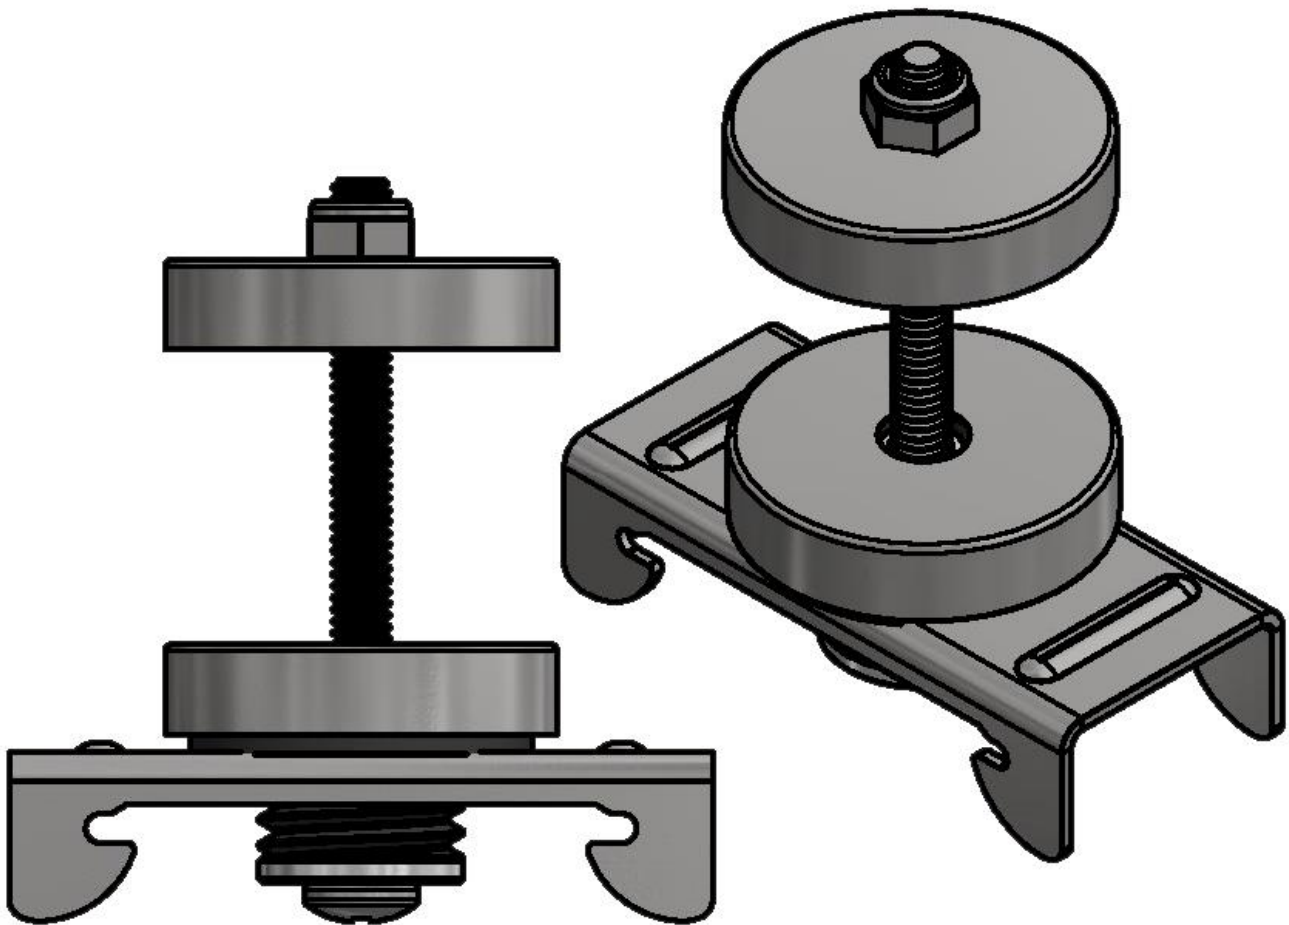

PAC International, Inc. Tel: (866) 774-2100 Fax: (866) 649-2710 Web Site: [www.pac-intl.com](http://www.pac-intl.com)

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710  
RSIC® is a registered Trade Mark of PAC International, LLC.


# RSIC-1 TTC SOUND ISOLATION SYSTEMS

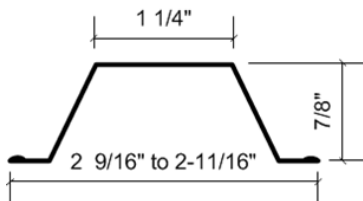

## Drywall Furring Channel: (AKA “Hat Track”)

- **Requirements:** 25 gauge, hemmed edge detail required on all 25 gauge furring channel. Meets or exceeds SSMA requirements.
- **Depth:** 7/8 inch
- **Width Bottom:** 2-9/16” to 2-11/16” inch wide nominal.
- **Width Top:** 1-1/4 inch wide

Splice drywall furring channel (hat track) with 6 inch overlap in mid span (between two clips) secure with 18 ga tie wire, or two 7/16” framing screws.

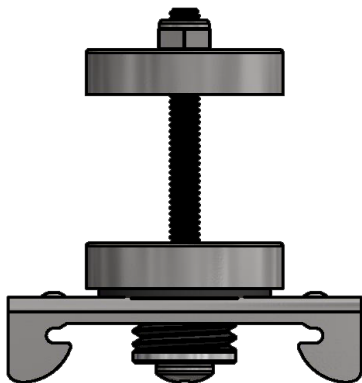


## Resilient Sound Isolation Clip (RSIC-1 TTC)

- **Maximum Spacing:** 48 inches on center
- **Maximum Acoustical Design Load:** 36 lbs

## Fasteners:

- **1/4” x 3” to 6” hex head bolt or machine screw.**

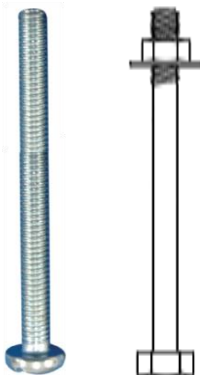


## Average Labor Rates:

- **RSIC-1:** 72 clips per man hour
- **Drywall Furring Channel:** 550LF per man hour

Labor rates provided to PAC International, Inc by an independent contracting firm.

PAC International, Inc. Tel: (866) 774-2100 Fax: (866) 649-2710 Web Site: [www.pac-intl.com](http://www.pac-intl.com)

# RSIC-1 TTC SOUND ISOLATION SYSTEMS

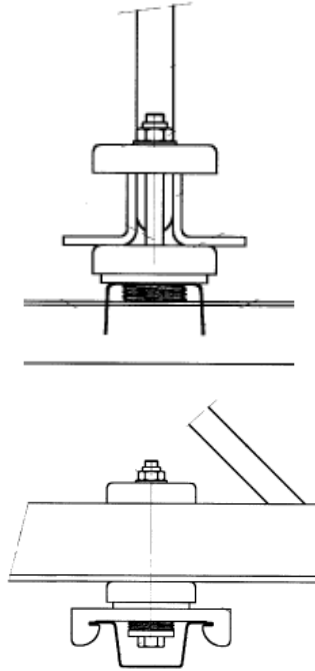

## Ceilings: One and Two Layers of 5/8" Gypsum Board

### Inst

- Resilient Sound Isolation Clips (RSIC-1 TTC) shall be 48 inches maximum on center.
- Fasten the Resilient Sound Isolation Clip (RSIC-1 TTC) to the bottom chord of the open web steel truss with a fastener approved for a minimum pull-out and shear of 120 lbs.
- From top to bottom of RSIC-1 TTC assembly
  1. 1/4x20 nylock hex nut
  2. RSIC Cup Washer facing downward
  3. RSIC-1 Cup Washer facing downward
  4. RSIC-1 Clip
  5. 1/4" bolt or machine screw
- To assemble, insert the hex head bolt or machine screw through the RSIC-1 clip, set on one RSIC Cup Washer over the bolt to cover the rubber section of the RSIC-1 clip, insert the bolt or machine screw between the bottom chords of the truss, set on the top cup washer facing downward, screw on the nylock hex head nut.
- When tightening the nylock nut ensure the internal metal ferrule is tight to the cup washer. This will secure the RSIC-1 TTC clip and keep it from moving during the gypsum board installation.
- Locate the first row of RSIC-1 clips within 6 inches of the wall at each end of a run. Space the clips at 48" intervals max. See page 4 for additional spacing details.
- Snap in the drywall furring channel (hat track) into the RSIC-1 clips.
- Install the gypsum board from leaving a 1/4" min. gap around the perimeter of the ceiling.
- Caulk around the entire perimeter of the gypsum board. Use fire and smoke rated acoustical sealant where required.

### General Information:

- Refer to [www.UL.com](http://www.UL.com), or [www.pac-intl.com](http://www.pac-intl.com) for complete installation details on all fire resistive assembly designs.
- Resilient Sound Isolation Clip (RSIC-1), furring channel (hat track) and gypsum board shall not carry heavy loads such as cabinets or bookshelves.
- For focused loads add RSIC-1 Backer clip.
- Splice furring channel (hat track) with 6 inch overlap in mid span, secure with 18 ga. tie wire or with two framing screws (7/16")
- Seal all potential air leaks with non-hardening acoustical caulking to achieve best noise control results. Use fire rated sealant where required.
- When attaching the RSIC-1 clips to a steel stud the minimum allowable thickness is 20 ga. (0.030).



### Fire Test Information:

Approved for use in over 150 different UL fire resistive design assemblies.

Check our website for the latest updates of the fire testing approvals

[WWW.PAC-INTL.COM](http://WWW.PAC-INTL.COM)

Check UL Fire Resistance Directory File # R16638

Check UL's web pages. [www.ul.com/database](http://www.ul.com/database)

Contact UL (877) UL-HELPS

PAC International, Inc. Tel: (866) 774-2100 Fax: (866) 649-2710 Web Site: [www.pac-intl.com](http://www.pac-intl.com)

© PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710



RSIC® is a registered Trade Mark of PAC International, LLC.

# RSIC-1 TTC SOUND ISOLATION SYSTEMS

## APPLICATION RECOMMENDATION FOR CEILING

### INSTALLING RESILIENT SOUND ISOLATION CLIPS (RSIC-1TTC)

## RSIC CLIPS AT 24" OC. 1 or 2 Layers of Gyp Board

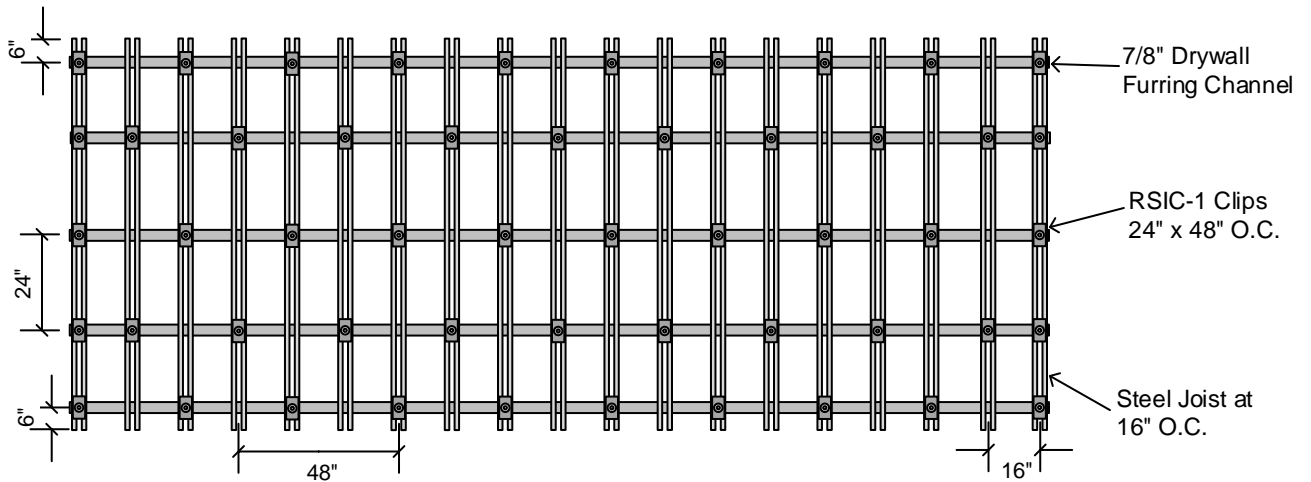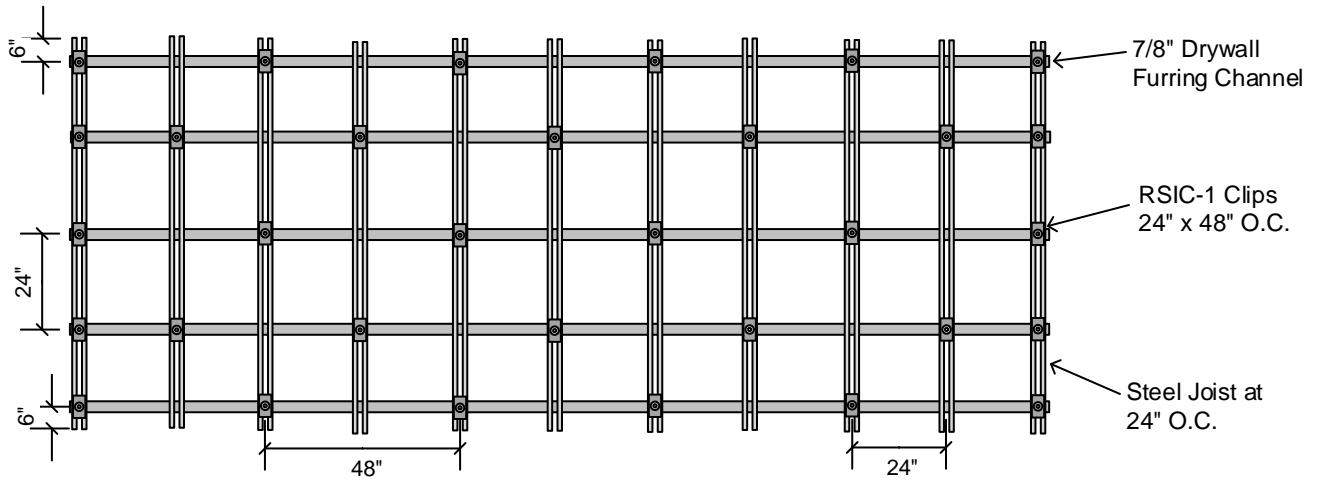

PAC International, Inc. Tel: (866) 774-2100 Fax: (866) 649-2710 Web Site: [www.pac-intl.com](http://www.pac-intl.com)