




### RSIC-1 TTC

The RSIC-1 TTC® is designed for use with steel open web truss. The RSIC-1 TTC® Bolts to the bottom cord of the truss. This assembly decouples the gypsum board from the floor structure above, giving the assembly enhanced acoustical performance. With an Acoustical design load rating of 36 lbs per isolator, the RSIC-1 clip can support up to two layers of 5/8" gypsum board when spaced no more that 24" x 48" oc. The RSIC-1 systems have several UL fire resistive design assemblies from ranging one hour to four hours. The UL assemblies can be viewed on our site at [http://pac-intl.com/fire\\_ratings\\_list.html](http://pac-intl.com/fire_ratings_list.html), and on UL.com

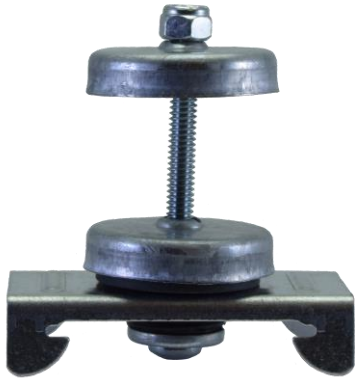


### **RSIC-1 TTC, the Low Cost, High Performance, Noise control Solution**

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

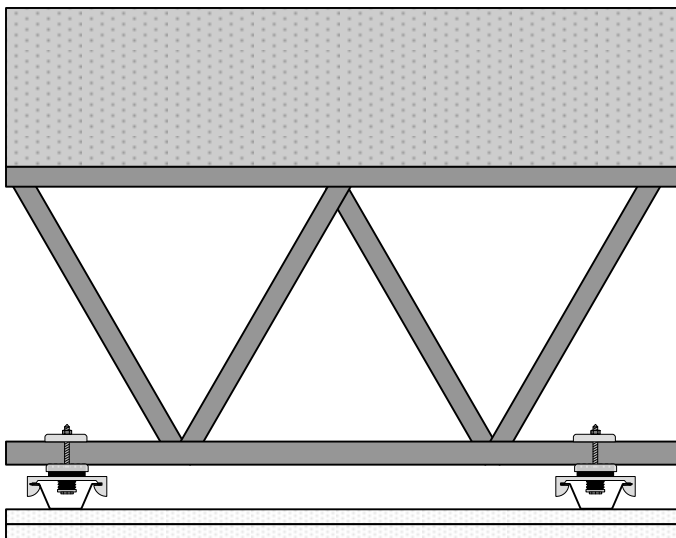

#### RSIC-1 TTC specifications:

Acoustical design load:	36 Lbs
Total deflection	3 mm
Double deflection	Yes (1.5 mm)
Made with Recycled content	Yes
Cryo low VOC treated	Yes
Adjustable	No
Cavity min	1-5/8"
Cavity Max	1-5/8"
Adjustment limit	N/A
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	No
Assembled In USA	No