



RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

RSIC-ADAPT Side Mount


ADAPT-SB

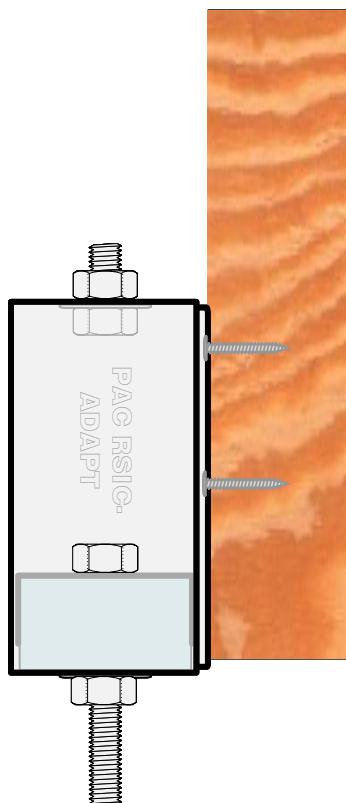

ADAPT-SC

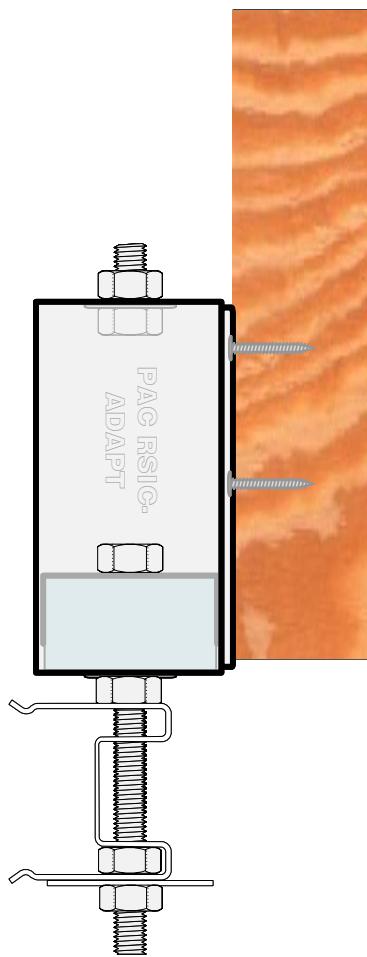

ADAPT-SW

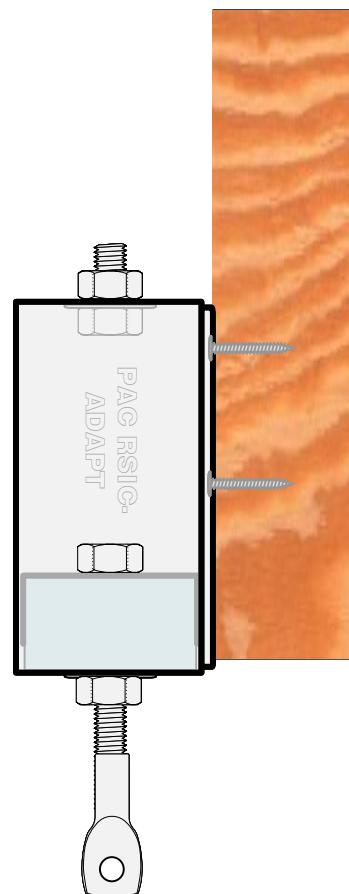


**SHIPPED FULLY
ASSEMBLED**

PAC International, LLC. Tel: (866) 774-2100 Web Site: www.pacinternationalllc.com

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710
RSIC® is a registered Trademark of PAC International, LLC.

RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

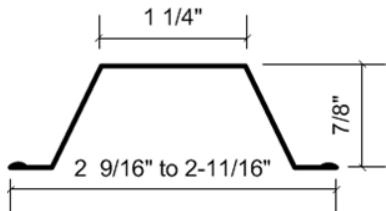

Drywall Furring Channel:

- **Furring Channel:** 20 gauge standard. Meets or exceeds SSMA requirements.
- **Depth:** 7/8 inch
- **Width Bottom:** 2-9/16" to 2-11/16" inch wide nominal.
- **Width Top:** 1-1/4 inch wide

Splice drywall furring channel (hat track) with 6 inch overlap in mid span (between two clips) secure with 18 ga tie wire, or two 7/16" framing screws.

Carrier Channel Options:

- **48" spacing 16 Gauge Cold Rolled Channel (CRC)** Dim: 1/2" x 1.5" x 1/2" SSMA code: 150U050-54
- CRC and Steel Studs must meet or exceed SSMA standards
- **Drywall Grid:** Max spacing fro Main runners 48" oc.

Fasteners:

- **RSIC-ADAPT Side Mount to Wood:** 2 ea #10 x 1-1/2 inch minimum size coarse thread screw.
- **RSIC-ADAPT Side Mount to Steel:** 2 ea # 8 x 1 inch minimum size fine thread screw. (Recommended #12 or #10 x 1inch hex head)
- **1.5" x 16 Gauge Cold Rolled Channel (CRC) 1/2" x 1.5"** Use min 9/16" self drilling framing screws to fasten the 1.5" CRC channel to the RSIC-ADAPT
- CRC and Steel Studs must meet or exceed SSMA standards

RSIC-ADAPT Isolator





- **Maximum Spacing:** 48" oc. with Cold Rolled Channel
- **Deflection up to 2.5 mm below preset height when fully loaded.**
-
- **LT Blue (260) up to 80 Lbs**
- **Blue (400) up to 120 Lbs**
- **DK Blue (650) up to 160 Lbs**

80 Lb

120 Lb

160 Lb

RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

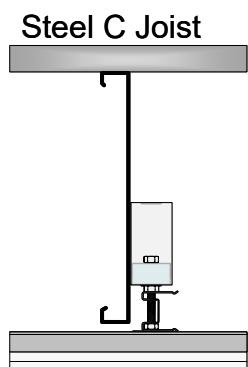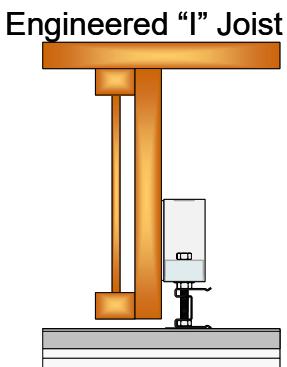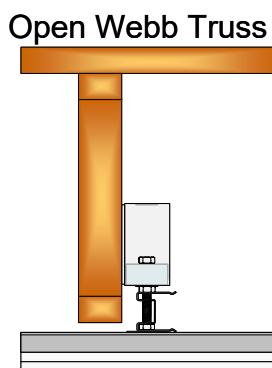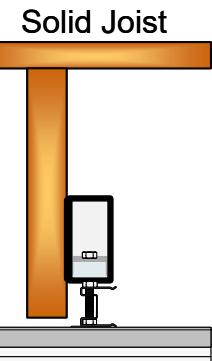

Ceilings: RSIC-ADAPT clips installed 48" oc

- Resilient Sound Isolation Clips (RSIC-ADAPT) shall be max 48 inches on center .
- Layout the RSIC-ADAPT clips according to general guidelines represented in this installation manual.
- Carefully remove RSIC-ADAPT pre-assembled isolators from packaging.
- Verify the correct quantity of each RSIC-ADAPT isolators are included in the shipment.
- Layout the RSIC-ADAPT clips out on the floor (reflecting the ceiling above) Ensure there are no additional items required to complete the installation, IE: Additional blocking to support the RSIC-ADAPT clips, or additional CRC channel to support the drywall furring channel.
- Fasten the Resilient Sound Isolation Clip (RSIC-ADAPT) to the structure with fasteners approved for a minimum pull-out and shear of 3 times the rated load. Allowing for up to 2.5mm deflection after the gypsum board has been installed.
- Using a laser level, or tape measure set the height for all of the RSIC-ADAPT brackets at the same height.
- At the perimeter, the distance between the wall and first support for the drywall shall be less than 8"
- Snap the 16 Ga cold rolled channel to the RSIC-ADAPT EZ clip. This is a temporary connection to speed up installation.
- Screw the RSIC-ADAPT EZ clip to the CRC channel with 9/16" min screws to make a permanent connection.
- Wire tie, screw or use wire clips to attach the drywall furring channel to the cold rolled channel @ 24" oc., 16" oc., or as needed to support the weight of the ceiling system. (Typical: 24" oc for 1 or 2 layers of gyp board, 16" oc for 3 layers of gyp board)





80 Lb

120 Lb

160 Lb

- LT Blue (260) up to 80 Lbs
- Blue (400) up to 120 Lbs
- DK Blue (650) up to 160 Lbs

RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

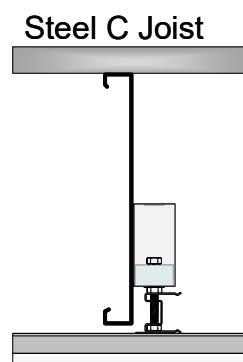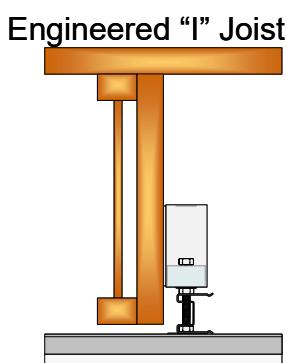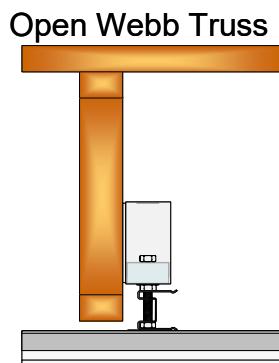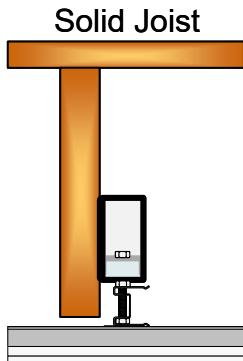

Adjustment:

- To field adjust the RSIC-ADAPT clip, Adjust where the RSIC-ADAPT is mounted to the framing.
- The RSIC-ADAPT clip is designed to deflect up to 2.5 mm from its position after the ceiling has been fully installed.

Ceilings:

- Where required add strong back consisting of 1.5" Cold Rolled Channel or 2 pieces of drywall furring channel nested together, on the top side of the standard drywall furring channel to add connection points for supporting the ceiling gypsum board or Ex expansion joints in the ceiling. The strong back shall be placed perpendicular to the main drywall furring channels
- Install the gypsum board to the drywall furring channel leaving a 1/4" gap around the perimeter of the entire ceiling.
- Caulk around the entire perimeter of the ceiling wall intersection.
- Use fire and smoke rated acoustical sealant where required.
- For heavy ceilings or focus load, additional RSIC-ADAPT isolators may need to be added.

General Information:

- Resilient Sound Isolation Clip Isolator (RSIC-ADAPT), furring channel (hat track) and gypsum board may carry heavy loads such as Projectors, HVAC Ducting, Curtains, etc. For these items use additional RSIC-ADAPT isolation hangers for additional load, or focus loads.
- Splice furring channel (hat track) with 6 inch overlap in mid span, secure with 18 ga. tie wire or with two framing screws (7/16")
- Seal all potential air leaks with non-hardening acoustical caulking to achieve best noise control results. Use fire rated sealant where required.
- When attaching the RSIC-ADAPT clips to a steel Joist the minimum allowable thickness is 20 ga. (0.030).


Fire Test Information: Coming Soon

www.pacinternationallc.com

RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

Sample layout 48" oc.

Framing @ 16" oc. CRC @ 48" oc. DFC @ 16" oc.

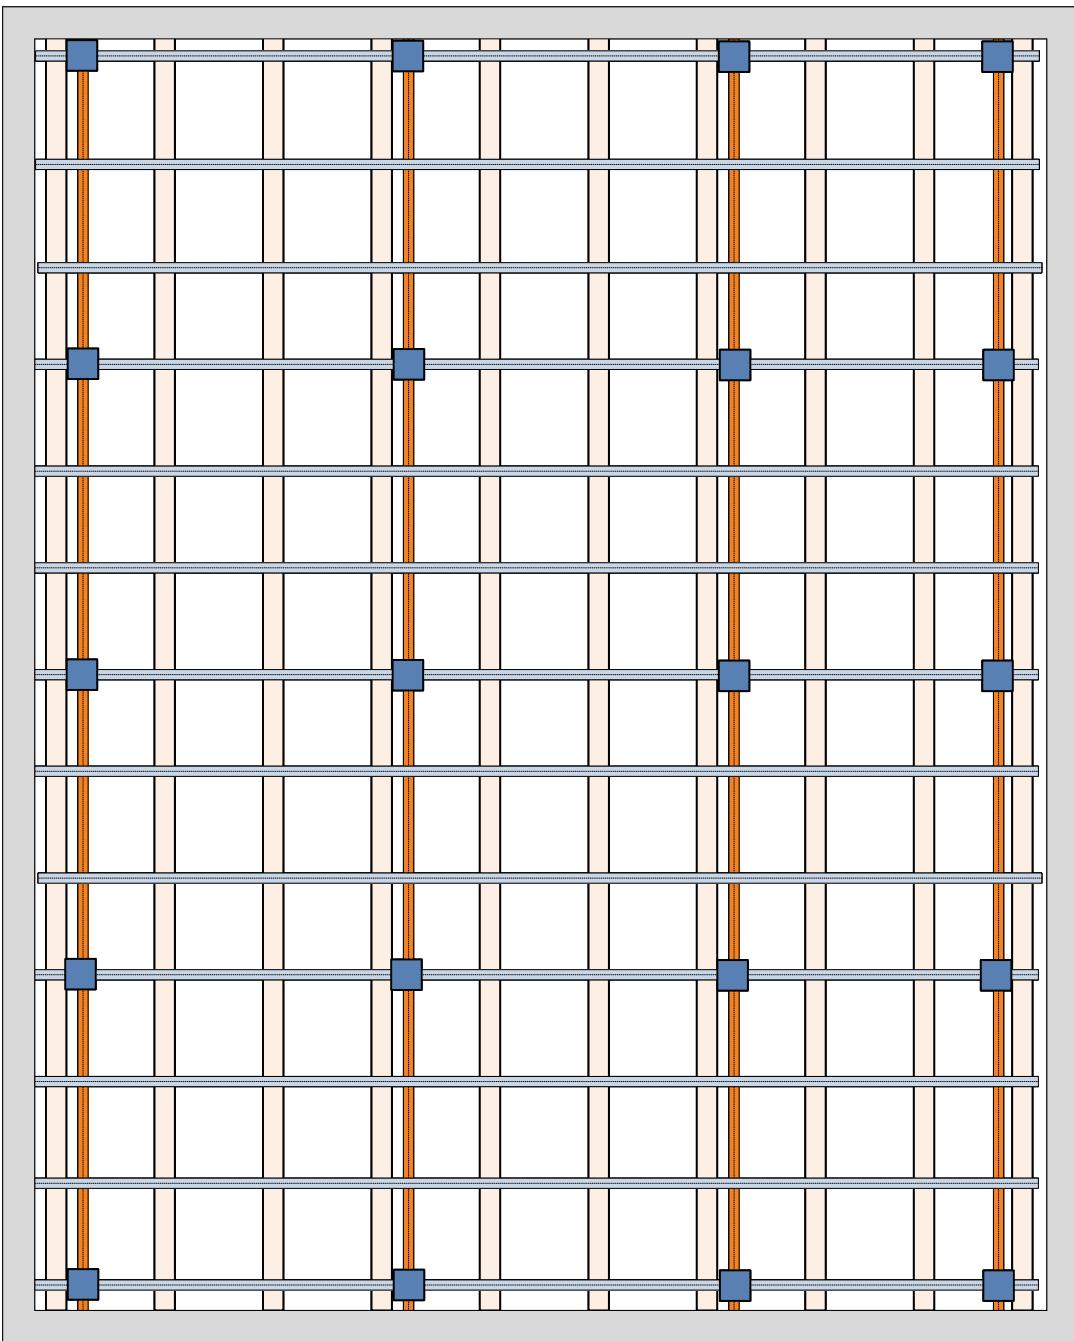

Crc Channel



Joist



Drywall Furring Channel



RSIC-ADAPT



PAC International, LLC. Tel: (866) 774-2100 Web Site: www.pacinternationallc.com


PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trademark of PAC International, LLC.

RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

Sample layout 48" oc.

Framing @ 24" oc. CRC @ 48" oc. DFC @ 16" oc.

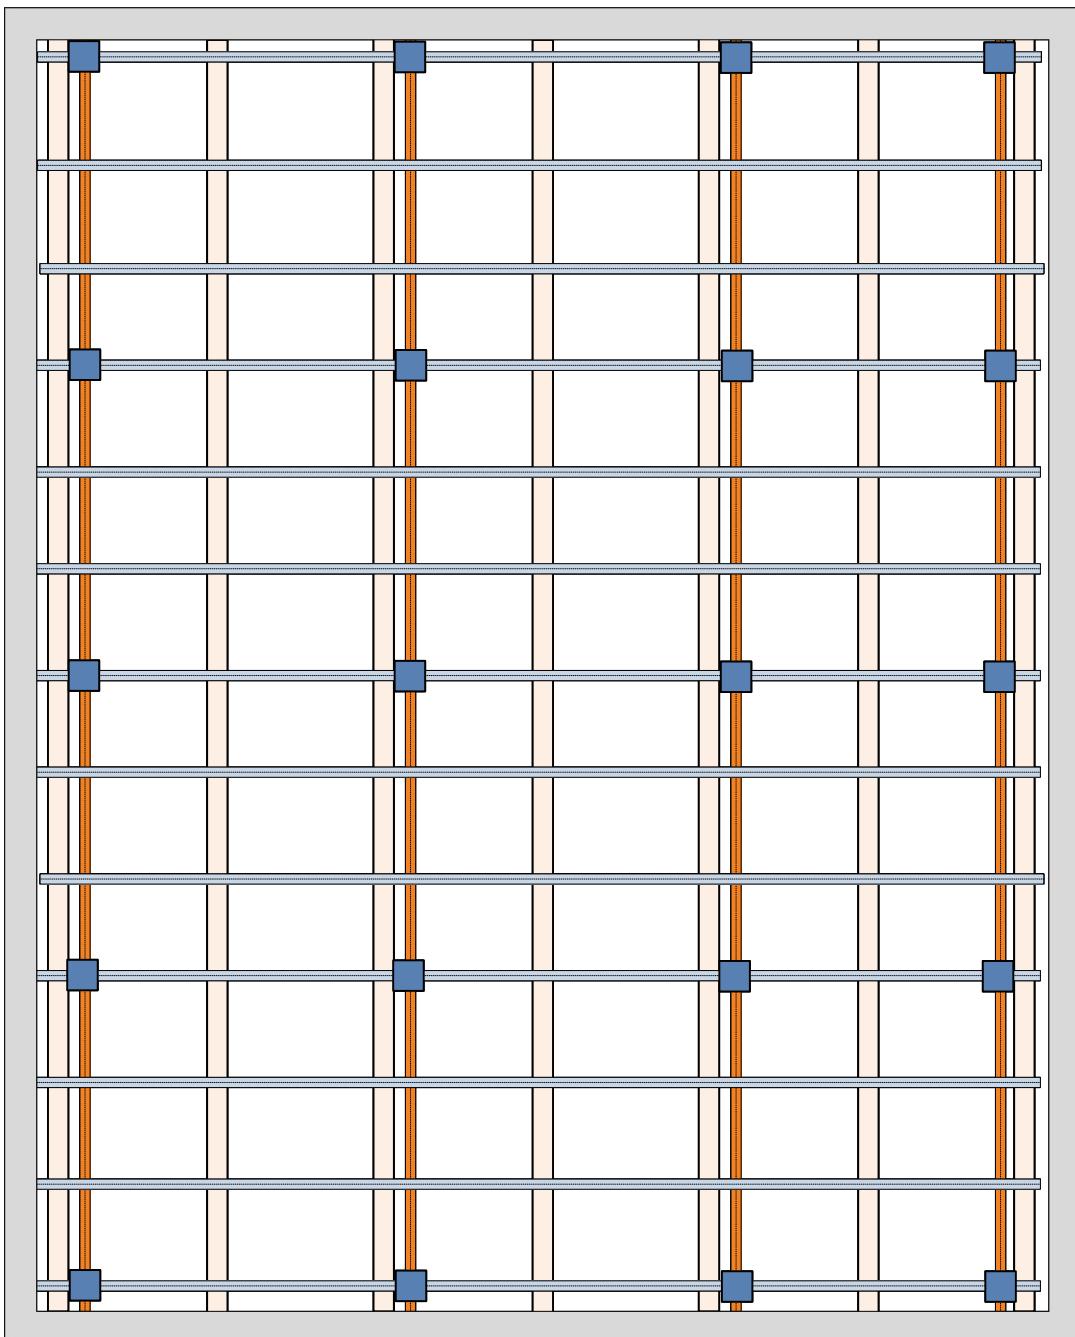

Crc Channel



Joist



Drywall Furring Channel



RSIC-ADAPT



PAC International, LLC. Tel: (866) 774-2100 Web Site: www.pacinternationalllc.com


PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trademark of PAC International, LLC.

RSIC-ADAPT SIDE MOUNT INSTALLATION GUIDE

Sample layout 48" oc.

Framing @ 24" oc. CRC @ 48" oc. DFC @ 24" oc.

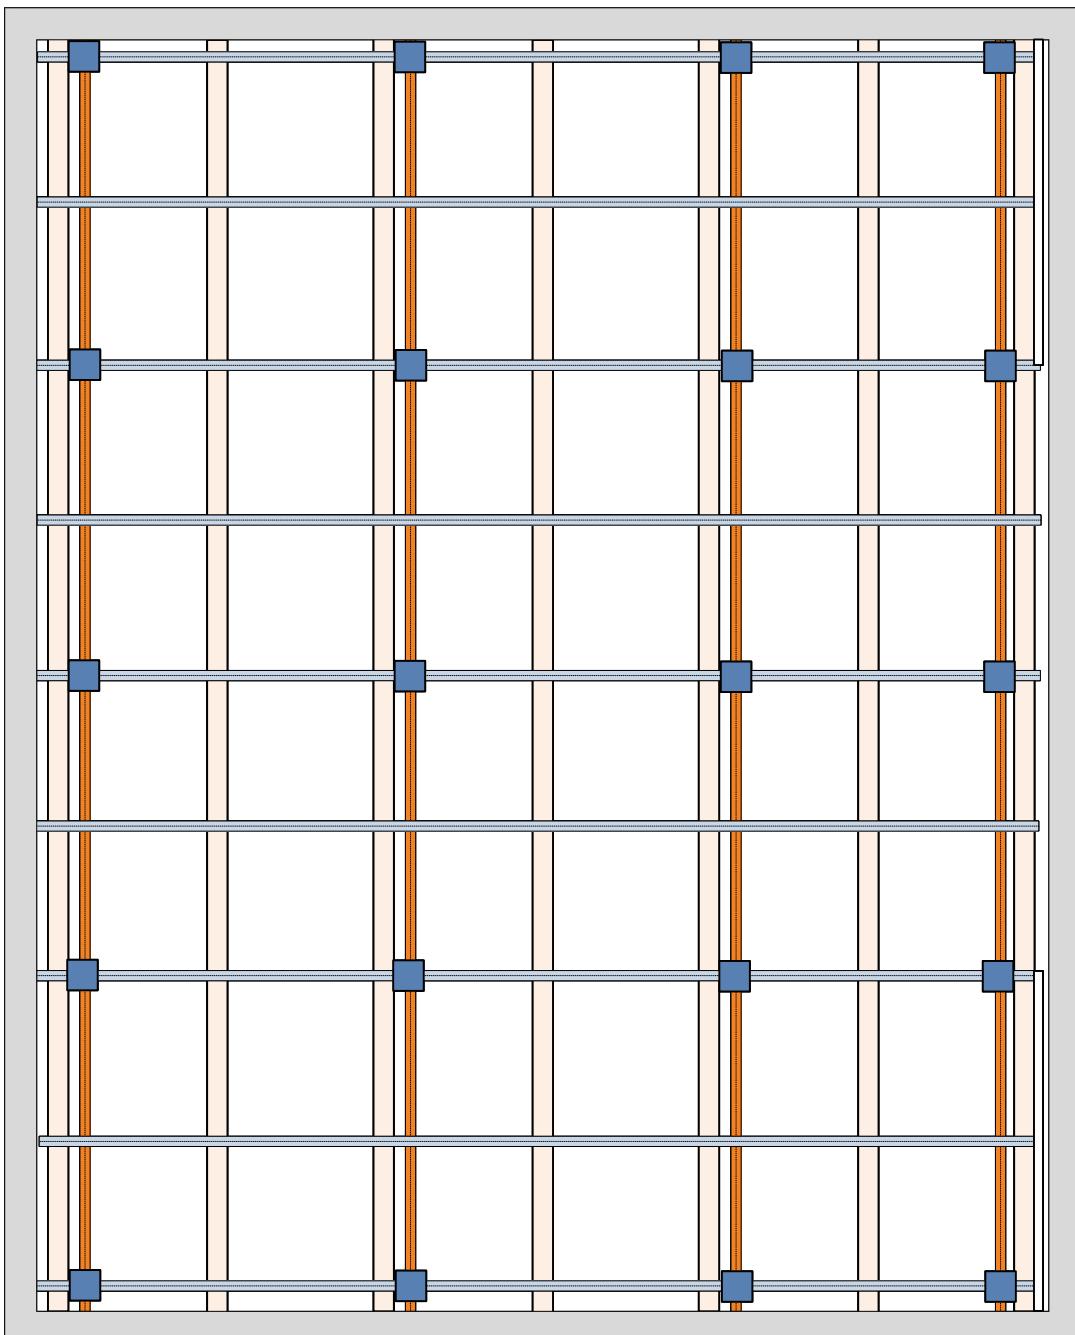

Crc Channel



Joist



Drywall Furring Channel



RSIC-ADAPT



PAC International, LLC. Tel: (866) 774-2100 Web Site: www.pacinternationallc.com

PAC International, LLC. All Rights Reserved. • (866) 774-2100 • Fax (866) 649-2710

RSIC® is a registered Trademark of PAC International, LLC.