



RSIC-DC04X2

The **RSIC-DC04X2®** are very versatile products. The most common use is the decoupling of wall systems, isolating ceilings, and mechanical vibration control. The design of the RSIC-DC04X2® can be used in new construction or retrofit. Below are some examples of the possible uses for the RSIC-DC04X2® .





- Dropped Ceiling
- Garage Door Motor Isolation
- Garage Door Rail Isolation
- Decoupled connector for isolating walls built within another wall
- Speaker Isolators
- Vent Fan Isolators
- Recessed Lighting Isolators
- Projector Mount Isolators
- Electrical Box or Ceiling Fan Isolators

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

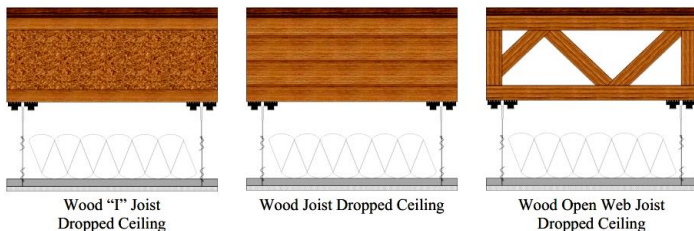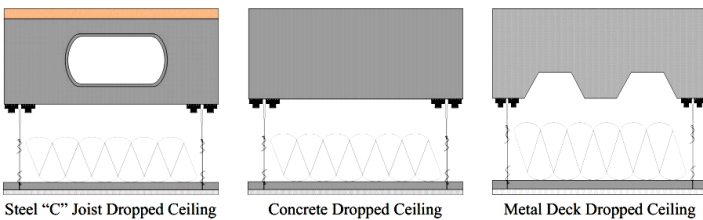

RSIC-DC04X2 specifications:

Made in the USA	YES
Acoustical design load:	72 lbs
Total deflection	3 mm
Double deflection	YES
Made with Recycled content	YES
Cryo low VOC treated	YES
Adjustable	YES
Cavity min	4-1/2"
Cavity Max	Var.
Adjustment limit	Var.
Use on Ceilings	YES
Use on walls	YES
New Construction	YES
Retro Fit	YES
Assembled In USA	YES



RISC-DC04X2 HD/DD

The **RISC-DC04X2 HD/DD** is a heavy duty universal and versatile product. One common use is to decouple wall systems.




The design of the RISC-DC04X2 HD/DD can be used in new construction or retrofit. The RISC-DC04X2 HD/DD is very strong for use when heavier items need to be acoustically decoupled for noise isolation.

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

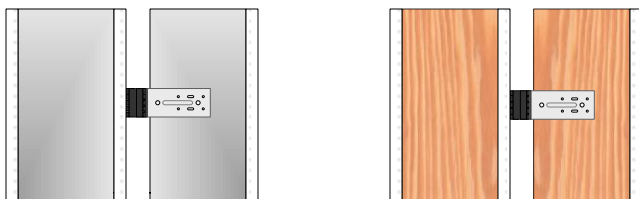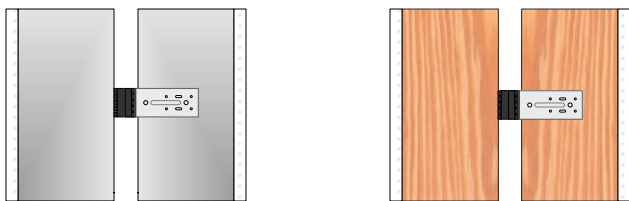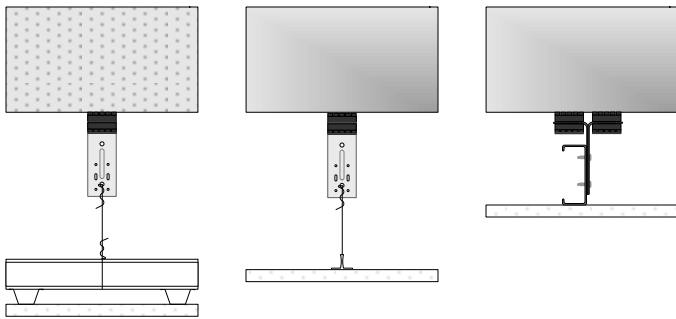

RISC-DC04X2 HD/DD specifications:

Made in the USA	YES
Acoustical design load:	144 lbs
Total deflection	3 mm
Double deflection	YES
Made with Recycled content	YES
Cryo low VOC treated	YES
Adjustable	YES
Cavity min	4-1/2"
Cavity Max	Var.
Adjustment limit	Var.
Use on Ceilings	YES
Use on walls	YES
New Construction	YES
Retro Fit	YES
Assembled In USA	YES