



RSIC-SI-CRC EZ



The RSIC-SI-CRC EZ is designed to isolate the ceiling consisting of 1.5" x 16 Ga cold rolled channel and furring channel (25 or 20 Ga). The RSIC-SI-CRC EZ clip is available in 10 lb, 20 lb, 40 lb, 80 lb versions. Maximum spacing for the RSIC-SI-CRC is 48" x 48" oc. The RSIC-SI-CRC EZ clips unique universal mounting system allows it to be mounted to wood and steel framed systems. The RSIC-SI-CRC EZ isolator also has an all new install EZ option for faster installation.

Wood
Steel

Gymnasium
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

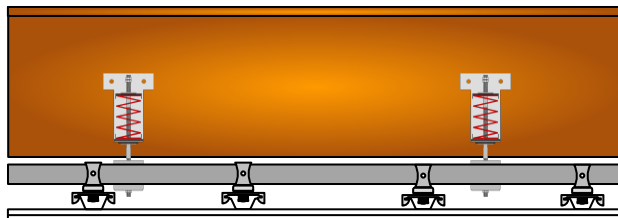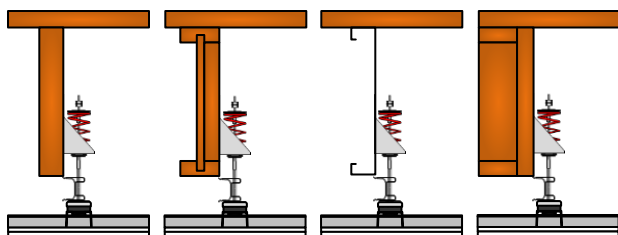

RSIC-SI-CRC EZ specifications:

Acoustical design load:	5 lbs to 80 lbs
Total deflection	1 inch
Double deflection	YES (+/- 1/2")
Pre-Calibrated	YES
Pre-Assembled	YES
Adjustable	YES
Cavity min	1 inch (wood)
Cavity Max	9 inches
Adjustment limit	6 inches
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Tested, Engineered, Designed, and Calibrated In USA	