




RSIC-SI-FF 3/8 WRC & BRC

The RSIC-SI-FF 3/8 EZ Series is a full frame spring and rubber isolator. This series of spring isolator can be attached directly to concrete (BRC) or used with hanger wire (WRC) to support cold rolled channel and hat channel ceiling.


The RSIC-SI-FF 3/8 EZ series is delivered Pre-calibrated, Pre-loaded, and Pre-assembled for ease of installation. The RSIC-SI-FF EZ series offer a high performance spring and rubber isolation system.



RSIC-SI-FF 3/8 WRC EZ

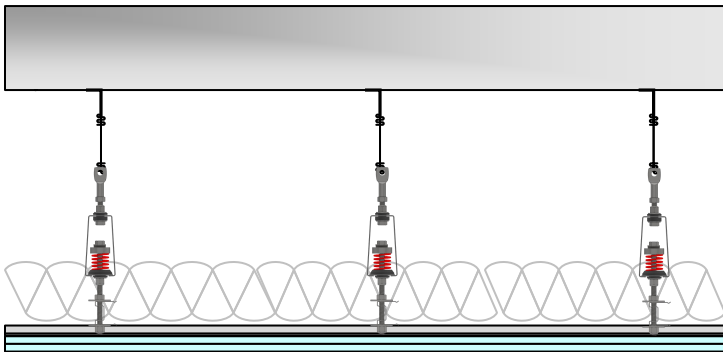

RSIC-SI-FF-BRC EZ

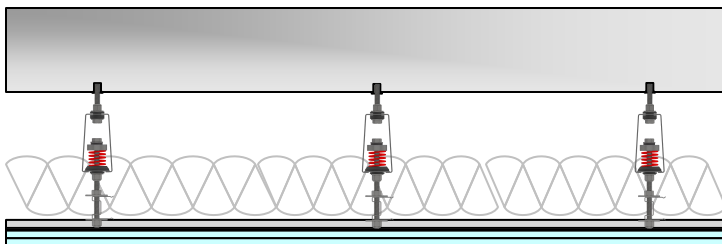

Commercial
Apartment
Retail
Conference Rooms

Condo
Recording Studio
Home Theater
Commercial theater

RSIC-SI-FF 3/8 EZ specifications:

Acoustical design load:	10 - 80 Lbs
Total deflection	1"
Double deflection	Yes
Adjustable	Yes
Cavity min	7"
Cavity Max	Unlimited
Adjustment limit	N/A
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Remodel	Yes
Tested, Engineered, Designed, and Calibrated In USA	