




### RSIC-SI-WHI

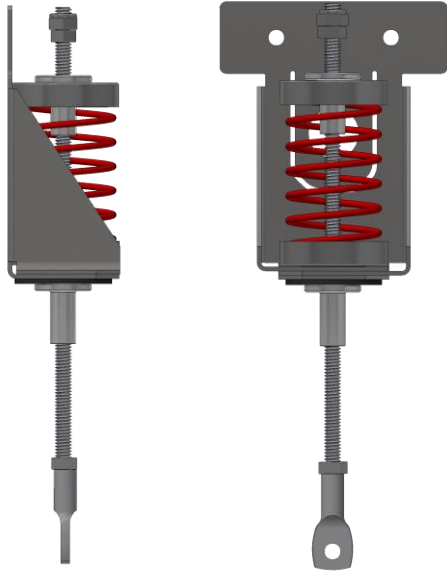


The **RSIC-SI-WHI** can be used to isolate pencil rod or hanger wire. Currently available in 5, 10, 20, 40, 60, 80 and 120 Lb options with 1" deflection. The 40# spring can support two layers of 5/8" Fire Code C with the Springs spaced at 4'x2' (2.5# x 2 layers x 8 Sq.Ft. = 40 pounds). The 80# spring can support two layers of 5/8" Fire Code C with the Springs spaced at 4'x4' (2.5# x 2 layers x 16 Sq.Ft. = 80 pounds). The 120 pound spring can support double the load or double the distance with a heavy duty Carrier Channel such as 3-5/8" x 20 gauge or heavier steel stud the spring can be at 4' x 8' OC

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

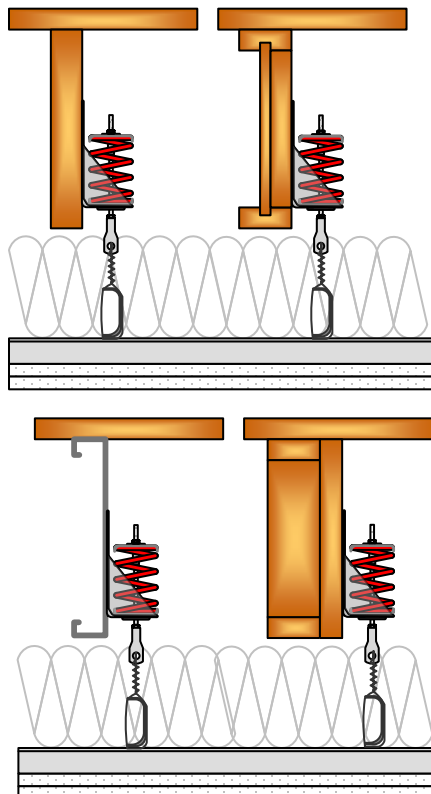

#### RSIC-SI-WHI specifications:

Acoustical design load:	5 lbs to 120 lbs
Total deflection	1 inch
Double deflection	YES (+/- 1/2")
Pre-Calibrated	YES
Pre-Assembled	YES
Adjustable	YES
Cavity min	1 inch (wood)
Cavity Max	48 inches
Adjustment limit	Wire Length
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Tested, Engineered, Designed, and Calibrated In USA	