




RSIC-SI-WHI

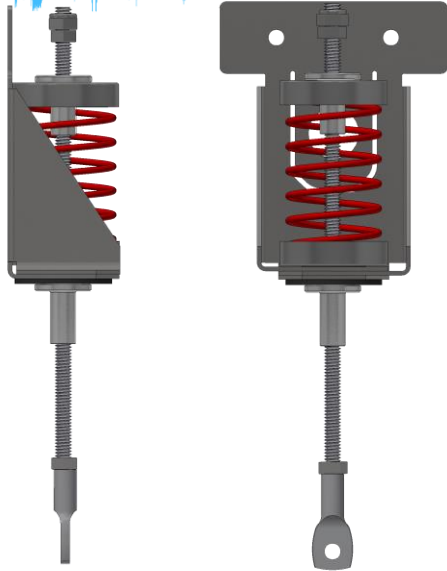


The **RSIC-SI-WHI** can be used to isolate pencil rod or hanger wire. Currently available in 5, 10, 20, 40, 60, 80, 120, and 160 lb options with 1" deflection. The 40# spring can support two layers of 5/8" Fire Code C with the Springs spaced at 4'x2' (2.5# x 2 layers x 8 Sq.Ft. = 40 pounds). The 80# spring can support two layers of 5/8" Fire Code C with the Springs spaced at 4'x4' (2.5# x 2 layers x 16 Sq.Ft. = 80 pounds). The 160 pound spring can support double the load or double the distance with a heavy duty Carrier Channel such as 3-5/8" x 20 gauge or heavier steel stud the spring can be at 4' x 8' OC

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

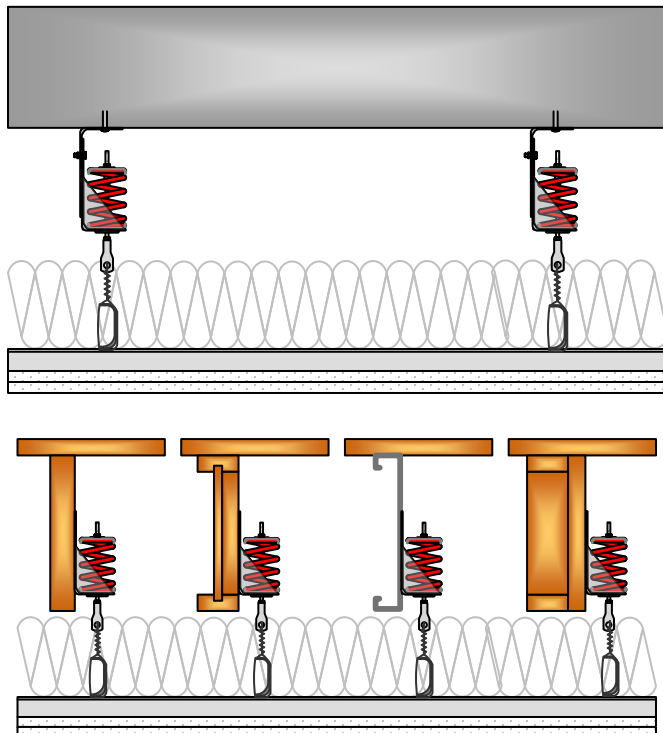

RSIC-SI-WHI specifications:

Acoustical design load:	5 lbs to 120 lbs
Total deflection	1 inch
Double deflection	YES (+/- 1/2")
Pre-Calibrated	YES
Pre-Assembled	YES
Adjustable	YES
Cavity min	1 inch (wood)
Cavity Max	48 inches
Adjustment limit	Wire Length
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Retro Fit	YES
Tested, Engineered, Designed, and Calibrated In USA	