

## 1. Product Name

- RSIC-SI-X CRC Resilient Sound Clip
  - RSIC-SI-X CRC Resilient Sound Isolation Spring Clip

## 2. Manufacturer

PAC International, LLC  
7260 W Azure Dr  
Suite 140-213  
Las Vegas, NV 89130  
Phone: (866) 774-2100  
Fax: (866) 649-2710  
Email: [info@pac-intl.com](mailto:info@pac-intl.com)  
Web: [www.PACInternationalLLC.com](http://www.PACInternationalLLC.com)

## 3. Product Description

### RSIC-SI-X CRC

The RSIC-SI-X CRC is designed for use with ceiling system where noise control is needed. The RSIC-SI-X CRC assembly decouples and isolates the gypsum board or other sheet goods from the structure increasing the acoustical performance of the system.

The RSIC-SI-X CRC stops the noise and vibrations that typically would be allowed to transfer through the structure.

### Materials and Composition

The RSIC-SI-X CRC spring and rubber isolator are made of rubber and/or manufactured rubber compound, and steel parts.


### Environmental Considerations

The RSIC-SI-X CRC may contribute to LEEDS points, by reducing materials needed to achieve high STC and IIC floor ceiling systems.

### Weight-bearing Information

With an acoustical design load rating of 26 pounds, 13 pounds and 7 pounds per isolator. The RSIC-SI-X CRC clip can support up to two layers of 5/8 inch gypsum board when spaced at 16" x 48" oc. For heavier systems increase the number of isolators and channel to support the additional weight of the system. The RSIC-SI-X CRC clip fastens directly to the underside of the structure.

## RSIC-SI-X CRC

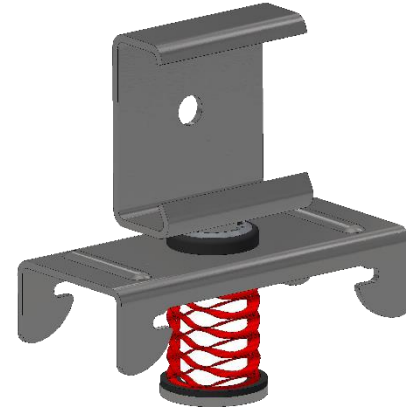

## Product Limitations

For interior use only with operating temperatures of 40–100 degrees F (4.4–37.8 degrees C). Max load 26 Lbs, 13 Lbs, 7 Lbs.

## 4. Technical Data

### Applicable Standards

### ASTM International (ASTM)

- **ASTM E90** Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
- **ASTM E492** Standard Test Method for Laboratory Measurement of Impact Sound Transmission Loss of Building Partitions and Elements
- **ASTM E413** Classification for Rating Sound Insulation

### Underwriters Laboratories (UL)

- **UL Fire Resistance Directory**; [www.UL.com](http://www.UL.com) or visit [here](#).

## 5. Installation

General installation: Follow manufacturer's specific installation instructions.

- Install RSIC-SI-X CRC Resilient Sound Isolation Spring Clip following the manufacturer recommendations.

- Clip the resilient sound isolation clips to the 1.5" CRC channel, then screw the RSIC-1.5 CRC to the 1.5" CRC channel.
- Space resilient sound isolation clips at maximum of 16 x 48 inches (600 x 460 mm) on center ceilings
- Do not exceed design load (pull and shear) of 36 pounds per isolator clip.
- Install 7/8" 25 Ga drywall furring channel (Hat Channel) into RSIC-SI-X at a maximum of 16 x 48 inches on center. 7/8" 25 GA drywall furring channel snaps into the RSIC-SI-X bottom part.
- Splicing Drywall Furring Channels:
  - Splice drywall furring channels with minimum of six inch overlap.
  - Secure laps with two framing screws or 18 gauge tie wire double wrapped
  - Locate splices between resilient sound isolation clips
  - Do not locate splices on resilient sound isolation clips
- Flanking Noise:
  - Review installation details to prevent structure-borne flanking noise
  - Do not allow drywall furring channels or gypsum board to contact wall framing members
- Gypsum Board:
  - Install gypsum board in perpendicular to the Drywall Furring Channel. Leave a 1/4 inch (6 mm) gap around perimeter for acoustical sealant application
  - Install gypsum board in accordance with ASTM C840 as specified in Section 09250
- Acoustical Sealant:
  - Seal potential air leaks with acoustical sealant to achieve best Field Sound Transmission Class (FSTC)
  - Seal electrical outlets and penetrations with acoustical sealant • Apply fire-rated acoustical sealant at locations where fire- rated assembly is required
- Putty Pad Sealant: acoustically seal with putty pads, electrical boxes in walls and ceilings in which resilient sound isolation clips are used 6. Availability and Cost Please contact PAC International, LLC. for availability and pricing information.

## 6. Availability and Cost

Please contact PAC International, LLC. for availability and pricing information.

## 7. Warranty

RSIC-SI-X CRC clips are guaranteed free of manufacturer defects. Only remedy is the replacement of the defective component or components. Manufacturer is not liable for delays or extra costs.

## 8. Maintenance

No maintenance is necessary.

## 9. Technical Services

PAC International LLC. offers online product pages, installation guides, and specification sheets. Technical information can be found on the website, <http://www.PACInternationalLLC.com> or by calling 866-774-2100

Fire ratings, sound test assemblies, CAD drawings, assembly drawings and clip specifications are also on the website.

## 10. Filing Systems

- Additional product information is available from the manufacturer upon request