



RSIC-SI-X CRC

The RSIC-SI-X CRC is designed for use with any joist or concrete application where a dropped drywall ceiling is required. The CRC top clip snaps onto cold rolled channel, allowing for all of the wires supporting the cold rolled channel to be hard connected to the ceiling above, including the vertical strut. The RSIC-SI-X has an acoustical design load range from 7 lbs to 25 lbs per isolator, the RSIC-SI-X resilient sound isolation clip can support up to two layers of 5/8" gypsum board. The spacing at 16" x 48" oc is the same for 1 or 2 layers of gypsum board.




RSIC-SI-X CRC, the High Performance, Noise control Solution

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

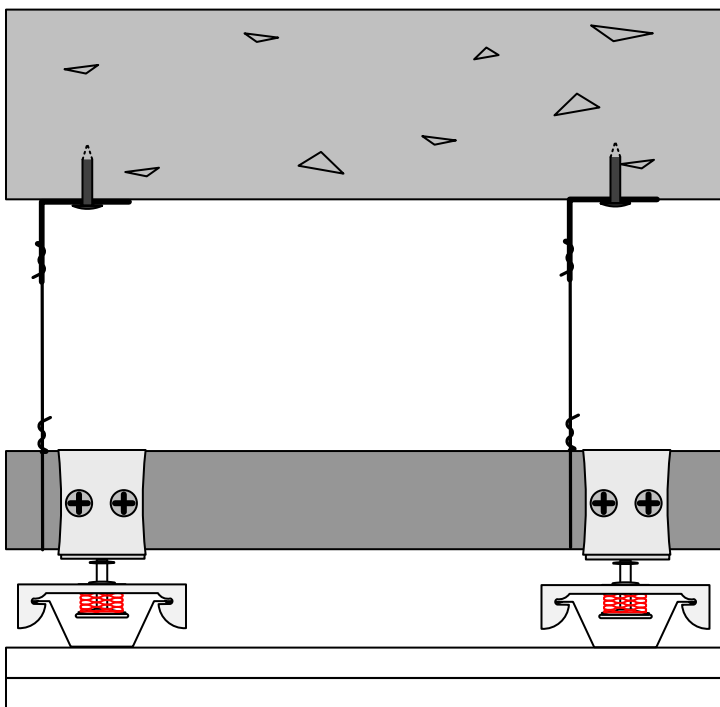

RSIC-SI-X Specifications:

Acoustical design load:	7 lb to 25 lb
Total deflection	0.5"
Double deflection	YES
Adjustable	NO
Cavity min	3-1/2" nom
Cavity Max	No limit
Use on walls	No
Use on Ceilings	YES
New Construction	YES
Retro Fit	YES
Spring Isolation	Yes
Rubber Isolation	Yes
Pre-Calibrated	Yes
Pre-Assembled	Yes

Made, Tested, Engineered, Designed, and Calibrated In USA