




RSIC-U-HD

The **RSIC-U-HD** is designed for use with any wood, steel or concrete application where noise control is required. This includes, wood framed, and steel framed wall systems that need Vibration and Noise Isolation from the structure below. The RSIC-U-HD Clip decouples the framed structure from the Floor it is mounted to at the floor-wall intersection stopping the transfer of noise. The RSIC-U-HD clip has an Acoustical design load rating of 72 lbs per isolator when used at the ceiling.

RSIC is the Low Cost, High Performance, Noise control Solution

Wood	Concrete
Steel	Condo
Metal deck	Commercial

Apartment	Recording Studio
Retail	Home Theater
Conference Rooms	Commercial theater

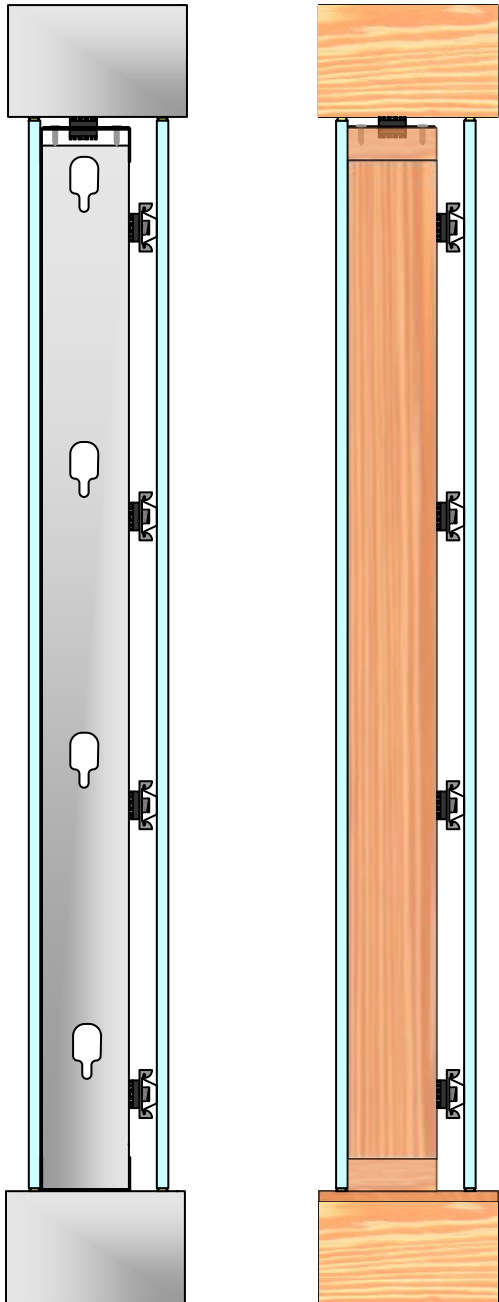

RSIC-U-HD specifications:

Acoustical design load:	72 Lbs
Total deflection	3 mm
Double deflection	Yes (1.5 mm)
Made with Recycled content	Yes
Low VOC treated	Yes
Adjustable	No
Cavity min	1/2"
Cavity Max	1/2"
Adjustment limit	N/A
Use on Ceilings	No
Use on walls	Yes
New Construction	Yes
Retro Fit	Yes
Assembled In USA	Yes