




RSIC-WHI

The **RSIC-WHI** is designed for use with any wood, steel or concrete application where a dropped drywall ceiling is required. The RSIC-WHI isolator installed mid-wire between the structure and a drywall grid ceiling, or CRC and hat channel ceiling. The RSIC-WHI Isolator has acoustical design load ratings of 30, 50, 70, 100, 145, and 220 lbs per isolator. The RSIC-WHI is designed to work within a range between 50% and 100% of the published acoustical design load.

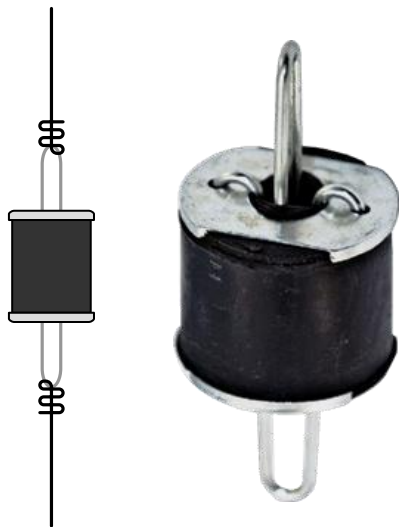

Blue	Brown	Green	Red	White	Yellow
15 to 30 Lbs	25 to 50 Lbs	35 to 70 Lbs	50 to 100 Lbs	73 to 145 Lbs	110 to 220 Lbs


RSIC-1, the Low Cost, High Performance, Noise control Solution

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

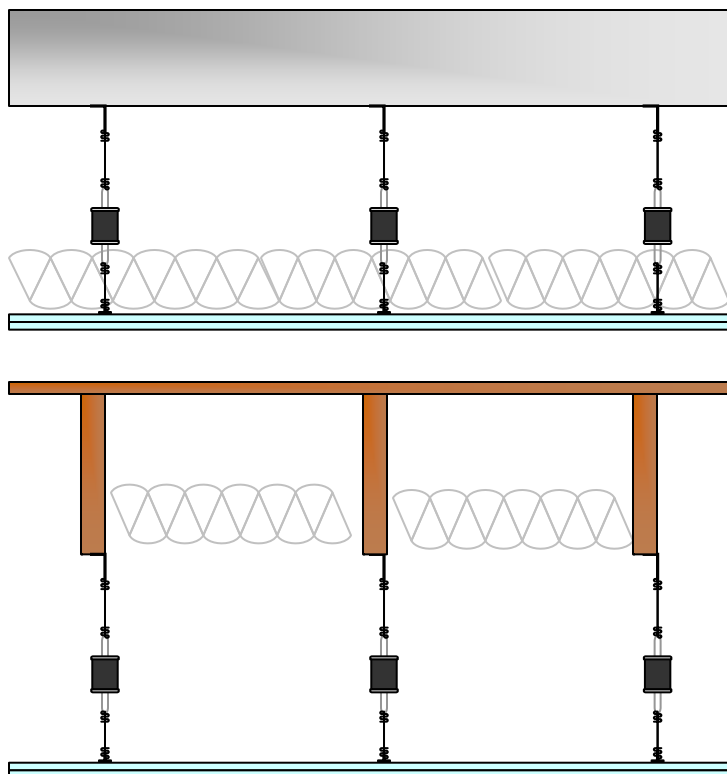

RSIC-WHI specifications:

Acoustical design load:	15 to 220 Lbs
Total deflection at load	6 mm
Double deflection	N/A
Low VOC treated	Yes
Adjustable	Yes
Cavity min	4"
Cavity Max	No limit
Adjustment limit	Wire length
Use on Ceilings	Yes
Use on walls	No
New Construction	Yes
Retro Fit	Yes